



(12) **United States Patent**  
**Kheradvar et al.**

(10) **Patent No.:** **US 9,656,009 B2**  
(45) **Date of Patent:** **May 23, 2017**

(54) **CARDIAC ASSIST SYSTEM USING HELICAL ARRANGEMENT OF CONTRACTILE BANDS AND HELICALLY-TWISTING CARDIAC ASSIST DEVICE**

(75) Inventors: **Arash Kheradvar**, Blythewood, SC (US); **Morteza Gharib**, San Marino, CA (US); **Anna Grosberg**, Cambridge, MA (US)

(73) Assignee: **CALIFORNIA INSTITUTE OF TECHNOLOGY**, Pasadena, CA (US)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 1067 days.

(21) Appl. No.: **12/218,237**

(22) Filed: **Jul. 11, 2008**

(65) **Prior Publication Data**

US 2009/0131740 A1 May 21, 2009

**Related U.S. Application Data**

(60) Provisional application No. 60/959,297, filed on Jul. 11, 2007, provisional application No. 61/010,786, filed on Jan. 11, 2008.

(51) **Int. Cl.**  
*A61N 1/362* (2006.01)  
*A61M 1/10* (2006.01)  
(Continued)

(52) **U.S. Cl.**  
CPC ..... *A61M 1/1068* (2013.01); *A61M 1/1003* (2014.02); *A61M 1/1048* (2014.02);  
(Continued)

(58) **Field of Classification Search**  
CPC ..... A61F 2/2481; A61F 2002/2478; A61F 2002/2481; A61F 2002/915; A61F 2/2478;  
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,434,835 A 1/1948 Colley  
2,663,467 A 12/1953 Douglass et al.  
(Continued)

FOREIGN PATENT DOCUMENTS

WO WO 92/06738 4/1992  
WO WO 02/28450 4/2002  
(Continued)

OTHER PUBLICATIONS

Notification of Transmittal of the International Search Report and the Written Opinion of the International Searching Authority.

(Continued)


*Primary Examiner* — Lindsey G Wehrheim

(74) *Attorney, Agent, or Firm* — One LLP

(57) **ABSTRACT**

A cardiac assist system using a helical arrangement of contractile bands and a helically-twisting cardiac assist device are disclosed. One embodiment discloses a cardiac assist system comprising at least one contractile elastic band helically arrangement around a periphery of a patient's heart, where upon an actuation the band contracts helically, thereby squeezing the heart and assisting the pumping function of the heart. Another embodiment discloses a helically twisting cardiac-apex assist device comprising an open, inverted, substantially conical chamber with two rotatable ring portions of different diameters located at the base and apex of the chamber, with a plurality of substantially helical connecting elements positioned substantially flush with the chamber wall and connecting the two rotatable ring portions, whereby a relative twisting motion of the two rings causes a change in volume of the chamber thereby assisting the cardiac pumping function.

**16 Claims, 5 Drawing Sheets**

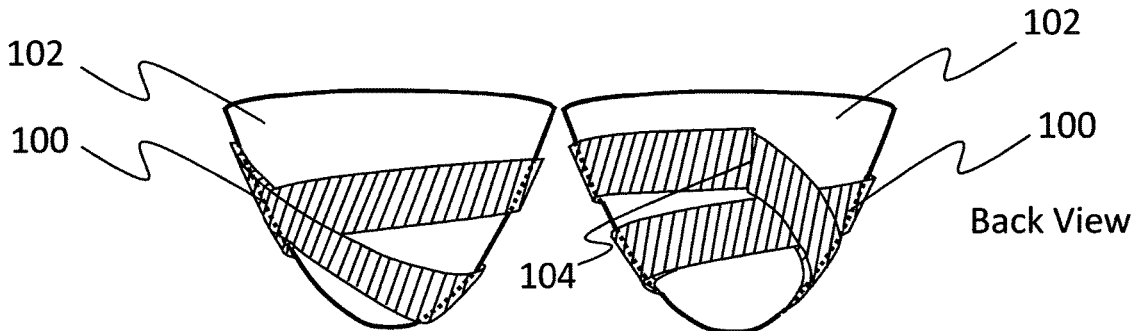

(51)	<b>Int. Cl.</b>		6,053,210 A	4/2000	Chapman et al.	
	<i>A61M 1/12</i>	(2006.01)	6,074,179 A	6/2000	Jokela et al.	
	<i>A61N 1/365</i>	(2006.01)	6,076,013 A	6/2000	Brennan et al.	
	<i>A61F 2/24</i>	(2006.01)	6,146,114 A	11/2000	Nardacci et al.	
	<i>A61F 2/915</i>	(2013.01)	6,151,525 A	11/2000	Soykan et al.	
	<i>A61N 1/36</i>	(2006.01)	6,210,432 B1*	4/2001	Solem .....	A61B 17/00234 623/1.11
	<i>A61M 1/36</i>	(2006.01)	6,224,540 B1	5/2001	Lederman et al.	
(52)	<b>U.S. Cl.</b>		6,254,355 B1	7/2001	Gharib	
	CPC .....	<i>A61M 1/122</i> (2014.02); <i>A61F 2/2478</i> (2013.01); <i>A61F 2/2481</i> (2013.01); <i>A61F</i> <i>2/915</i> (2013.01); <i>A61M 1/36</i> (2013.01); <i>A61N</i> <i>1/36</i> (2013.01); <i>A61N 1/3627</i> (2013.01); <i>A61N</i> <i>1/36514</i> (2013.01); <i>A61N 1/36521</i> (2013.01)	6,270,053 B1	8/2001	Eshel	
			6,278,847 B1	8/2001	Gharib et al.	
			6,314,322 B1	11/2001	Rosenberg	
			6,331,188 B1	12/2001	Lau et al.	
			6,343,605 B1	2/2002	Lafontaine	
			6,352,553 B1	3/2002	Van Der Burg et al.	
			6,352,561 B1	3/2002	Leopold et al.	
			6,361,637 B2	3/2002	Martin et al.	
(58)	<b>Field of Classification Search</b>		6,395,016 B1	5/2002	Oron et al.	
	CPC ...	<i>A61F 2/915</i> ; <i>A61N 1/3627</i> ; <i>A61N 1/36521</i> ; <i>A61N 1/36514</i> ; <i>A61N 1/36</i> ; <i>A61M 1/36</i> ; <i>A61M 1/1068</i> ; <i>A61M 1/1003</i> ; <i>A61M</i> <i>1/1048</i> ; <i>A61M 1/122</i>	6,408,878 B2	6/2002	Unger et al.	
	USPC .....	600/17; 607/3	6,425,856 B1*	7/2002	Shapland .....	A61F 2/2481 600/16
	See application file for complete search history.		6,428,464 B1	8/2002	Bolling	
			6,450,942 B1	9/2002	Lapanashvili et al.	
			6,464,476 B2	10/2002	Ross et al.	
			6,506,025 B1	1/2003	Gharib	
			6,508,756 B1	1/2003	Kung et al.	
			6,517,570 B1	2/2003	Lau et al.	
			6,520,986 B2	2/2003	Martin et al.	
			6,551,350 B1	4/2003	Thornton et al.	
			6,580,503 B2	6/2003	Gharib et al.	
			6,582,208 B2	6/2003	Gharib	
			6,607,368 B1	8/2003	Ross et al.	
			6,608,668 B2	8/2003	Gharib et al.	
			6,613,072 B2	9/2003	Lau et al.	
			6,620,095 B2	9/2003	Taheri	
			6,654,102 B1	11/2003	Modares et al.	
			6,670,699 B2	12/2003	Mikubo et al.	
			6,671,558 B1	12/2003	Soykan et al.	
			6,672,847 B2	1/2004	Dooley	
			6,679,687 B2	1/2004	Gharib	
			6,713,944 B2	3/2004	Omata et al.	
			6,716,002 B2	4/2004	Higashino	
			6,717,172 B2	4/2004	Gharib et al.	
			6,720,710 B1	4/2004	Wenzel et al.	
			6,787,972 B2	9/2004	Kim et al.	
			6,866,842 B1	3/2005	Chancellor et al.	
			6,884,040 B2	4/2005	Dooley	
			6,902,545 B2	6/2005	Bertolero et al.	
			6,910,466 B2	6/2005	Veinotte	
			6,956,230 B1	10/2005	Gharib et al.	
			6,984,201 B2	1/2006	Khaghani et al.	
			7,006,132 B2	2/2006	Pereira et al.	
			7,021,604 B1	4/2006	Werner et al.	
			7,031,775 B2	4/2006	Soykan et al.	
			7,033,132 B2	4/2006	Gharib	
			7,048,519 B2	5/2006	Fong et al.	
			7,051,738 B2	5/2006	Oron et al.	
			7,094,040 B2	8/2006	Higashino et al.	
			7,104,313 B2	9/2006	Pokharna et al.	
			7,107,777 B2	9/2006	Vaiyapuri et al.	
			7,118,525 B2*	10/2006	Coleman et al. ....	600/16
			7,155,288 B2	12/2006	Soykan et al.	
			7,163,385 B2	1/2007	Gharib et al.	
			7,331,991 B2	2/2008	Kheradvar et al.	
			7,387,500 B2	6/2008	Gharib	
			7,398,818 B2	7/2008	Gharib et al.	
			7,491,170 B2	2/2009	Gharib	
			7,524,298 B2	4/2009	Gharib et al.	
			7,612,869 B2	11/2009	Pereira et al.	
			7,749,152 B2	7/2010	Gharib et al.	
			2002/0082469 A1	6/2002	Taheri	
			2003/0121644 A1	7/2003	Tonosaki et al.	
			2003/0152469 A1	8/2003	Dante et al.	
			2003/0164231 A1	9/2003	Goodson et al.	
			2003/0209006 A1	11/2003	Gharib et al.	
			2003/0233023 A1	12/2003	Khaghani et al.	
			2003/0233143 A1	12/2003	Gharib et al.	
			2003/0234595 A1	12/2003	Takahashi et al.	
			2003/0235504 A1	12/2003	Lemoff et al.	
(56)	<b>References Cited</b>					
	<b>U.S. PATENT DOCUMENTS</b>					
	2,961,213 A	11/1960	Philippovic			
	3,066,853 A	12/1962	Landenberger			
	3,371,906 A	3/1968	Lubold			
	3,504,550 A	4/1970	Koch et al.			
	3,511,583 A	5/1970	Brown			
	3,593,718 A	7/1971	Krasner et al.			
	3,602,105 A	8/1971	Slusher			
	3,638,536 A	2/1972	Kleinwachter et al.			
	3,677,667 A	7/1972	Morrison			
	3,730,186 A	5/1973	Edmunds et al.			
	3,756,243 A	9/1973	Schulte			
	3,768,931 A	10/1973	Willis, Jr.			
	3,982,722 A	9/1976	Bernard			
	4,092,010 A	5/1978	Carlson, Jr.			
	4,240,434 A	12/1980	Newkirk			
	4,256,094 A	3/1981	Kapp et al.			
	4,292,969 A	10/1981	Raible et al.			
	4,401,107 A	8/1983	Haber et al.			
	4,463,502 A	8/1984	Fitzgerald et al.			
	4,553,271 A	11/1985	Baker			
	4,602,911 A	7/1986	Ahmadi et al.			
	4,697,989 A	10/1987	Perlov et al.			
	4,705,518 A	11/1987	Baker et al.			
	4,721,030 A	1/1988	Paynter			
	4,794,912 A	1/1989	Lia			
	4,808,079 A	2/1989	Crowley et al.			
	4,915,017 A	4/1990	Perlov			
	4,917,579 A	4/1990	Torma			
	5,019,121 A	5/1991	Krauter			
	5,033,270 A	7/1991	Hardt			
	5,166,563 A	11/1992	Bassine			
	5,197,984 A	3/1993	Kedem			
	5,203,172 A	4/1993	Simpson et al.			
	5,344,385 A	9/1994	Buck et al.			
	5,394,132 A	2/1995	Poil			
	5,443,504 A	8/1995	Hill			
	5,549,619 A	8/1996	Peters et al.			
	5,562,595 A	10/1996	Neisz			
	5,637,083 A	6/1997	Bertrand et al.			
	5,653,676 A	8/1997	Buck et al.			
	5,658,237 A	8/1997	Francischelli			
	5,678,564 A	10/1997	Lawrence et al.			
	5,697,884 A	12/1997	Francischelli et al.			
	5,697,952 A	12/1997	Francischelli et al.			
	5,701,919 A	12/1997	Buck et al.			
	5,716,379 A	2/1998	Bourgeois et al.			
	5,800,528 A	9/1998	Lederman et al.			
	5,984,857 A	11/1999	Buck et al.			
	5,996,964 A	12/1999	Ben-Shalom			

(56)

References Cited

U.S. PATENT DOCUMENTS

2004/0013536 A1 1/2004 Hower et al.  
 2004/0018100 A1 1/2004 Takagi et al.  
 2004/0031594 A1 2/2004 Vaiyapuri et al.  
 2004/0037035 A1 2/2004 Ohashi et al.  
 2004/0048778 A1 3/2004 Druggan  
 2004/0097787 A1\* 5/2004 French ..... A61F 2/2481  
 600/37  
 2004/0133260 A1 7/2004 Schwartz et al.  
 2004/0143319 A1 7/2004 Schwartz et al.  
 2004/0151607 A1 8/2004 Gharib  
 2004/0152945 A1 8/2004 Kantrowitz et al.  
 2004/0171904 A1 9/2004 French et al.  
 2004/0184237 A1 9/2004 Chang  
 2004/0225177 A1 11/2004 Coleman et al.  
 2005/0008509 A1 1/2005 Chang  
 2005/0070755 A1 3/2005 Zheng  
 2005/0092944 A1 5/2005 Patterson  
 2005/0098299 A1 5/2005 Goodson et al.  
 2005/0187620 A1\* 8/2005 Pai et al. .... 623/2.37  
 2005/0197527 A1 9/2005 Bolling  
 2005/0231914 A1 10/2005 Mikubo et al.  
 2005/0265978 A1 12/2005 Chancellor et al.  
 2005/0275494 A1 12/2005 Gharib et al.  
 2005/0277865 A1 12/2005 Gharib et al.  
 2006/0008450 A1 1/2006 Verfaillie et al.  
 2006/0084835 A1 4/2006 Laufer  
 2006/0106449 A1 5/2006 Ben Muvhar  
 2006/0120048 A1 6/2006 Houle et al.  
 2006/0131003 A1 6/2006 Chang et al.  
 2006/0139882 A1 6/2006 Mikubo et al.  
 2006/0147487 A1 7/2006 Henderson  
 2006/0216173 A1\* 9/2006 Kheradvar et al. .... 417/478  
 2006/0217588 A1 9/2006 Gross et al.  
 2007/0185371 A1 8/2007 Bortolotti  
 2008/0077070 A1 3/2008 Kopia  
 2008/0097497 A1 4/2008 Assad et al.  
 2008/0194905 A1 8/2008 Walsh  
 2008/0260705 A1 10/2008 Marban et al.  
 2009/0007923 A1 1/2009 Dancu  
 2009/0088651 A1 4/2009 Shuros et al.  
 2009/0105631 A1 4/2009 Kieval  
 2009/0177270 A1 7/2009 Agnew et al.  
 2009/0281560 A1 11/2009 Wexner et al.  
 2010/0114299 A1 5/2010 Ben Muvhar et al.

FOREIGN PATENT DOCUMENTS


WO WO 2005/011502 A2 12/2005  
 WO PCT/US2005/018455 4/2006  
 WO PCT/US2005/018455 11/2006  
 WO PCT/US2005/018592 12/2006

WO PCT/US2005/047234 2/2007  
 WO PCT/US2005/047234 7/2007  
 WO PCT/US2006/000986 9/2007  
 WO PCT/US2007/000309 11/2007  
 WO PCT/US2007/000309 7/2008  
 WO PCT/US2008/008539 6/2009  
 WO PCT/US2008/008539 1/2010  
 WO PCT/US2011/059597 6/2012  
 WO PCT/US2011/059597 5/2014

OTHER PUBLICATIONS

Helm, P., et al., "Measuring and Mapping cardiac fiber and laminar architecture using diffusion tensor MR imaging," Ann NY Acad Sci, 2005, 1047(1), pp. 296-307.  
 International Preliminary Report on Patentability for PCT/US2008/008539.  
 Avrahami, I., et al., "Computational studies of resonance wave pumping in compliant tubes", J. Fluid Mech., 2008, vol. 608, pp. 139-160.  
 Caro, C., et al., "The Mechanics of the Circulation", Cambridge University Press, 2<sup>nd</sup> Edition, 2012, pp. 238-255.  
 Curtis, S.L., et al., "Reduced systolic wave generation and increased peripheral wave reflection in chronic heart failure", Am J Physiol Heart Circ Physiol, 2007, vol. 293, pp. H557-H562.  
 Hickerson, A.I., et al., "Experimental study of the behavior of a valveless impedance pump", Experiments in Fluids, 2005, vol. 38, pp. 534-540.  
 Hickerson, A.I., et al., "On the resonance of a pliant tube as a mechanism for valveless pumping", J. Fluid Mech., 2006, vol. 555, pp. 141-148.  
 Kannel, W.B., et al., "Changing epidemiological features of cardiac failure", Br Heart J., 1994, vol. 72, No. 2, Supplement, S3-S9.  
 Lloyd-Jones, D.M., et al., "Lifetime risk for developing congestive heart failure: the Framingham Heart Study", Circulation, 2002, vol. 106, No. 24, pp. 3068-3072.  
 Mitchell, G.F., et al., "Pulsatile Hemodynamics in Congestive Heart Failure", Hypertension, 2001, vol. 38, pp. 1433-1439.  
 Mitchell, G.F., et al., "Arterial stiffness and cardiovascular events: the Framingham Heart Study", Circulation, 2010, vol. 121, No. 4, pp. 505-511.  
 Moser, M., et al., "Prevention of disease progression, left ventricular hypertrophy and congestive heart failure in hypertension treatment trials", J. Am. Coll. Cardiol., 1996, vol. 27, No. 5, pp. 1214-1218.  
 Nichols, W.W., et al., "McDonald's Blood Flow in Arteries: Theoretical, Experimental and Clinical Principles, Sixth Edition", CRC Press, 2011, pp. 170-222.  
 Ooi, H., et al., "Arterial Stiffness and Vascular Load in Heart Failure", Congestive Heart Failure, 2008, vol. 14, No. 1, pp. 31-36.  
 Pahlevan, N.M., et al., "Aortic Wave Dynamics and Its Influence on Left Ventricular Workload", PLoS ONE, 2011, vol. 6, No. 8, pp. 1-8.

\* cited by examiner

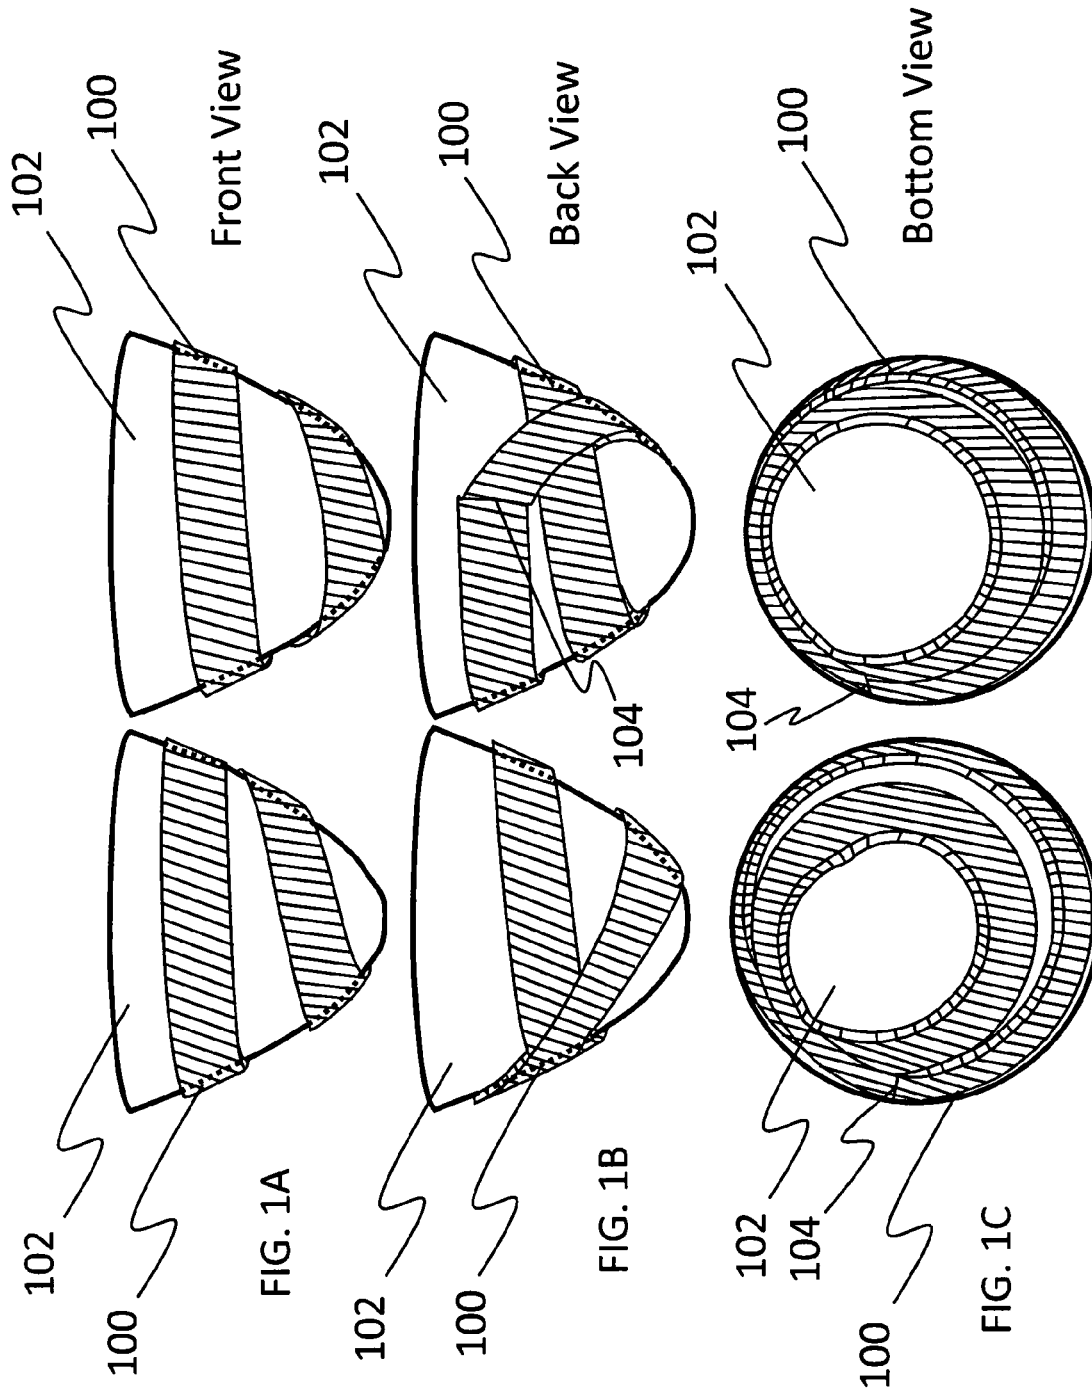

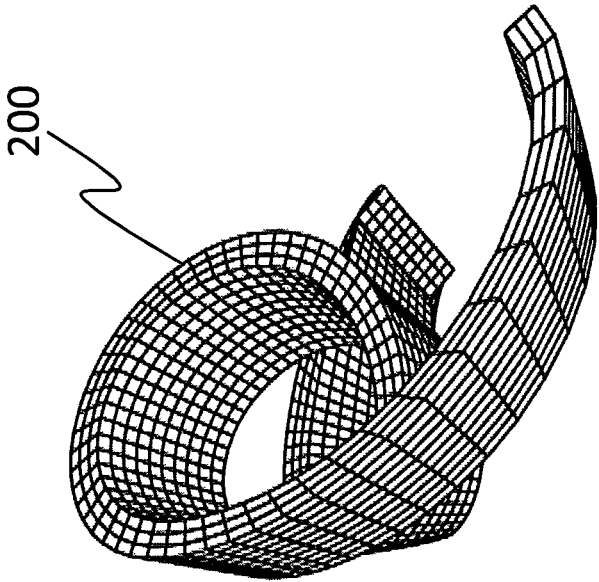


FIG. 2

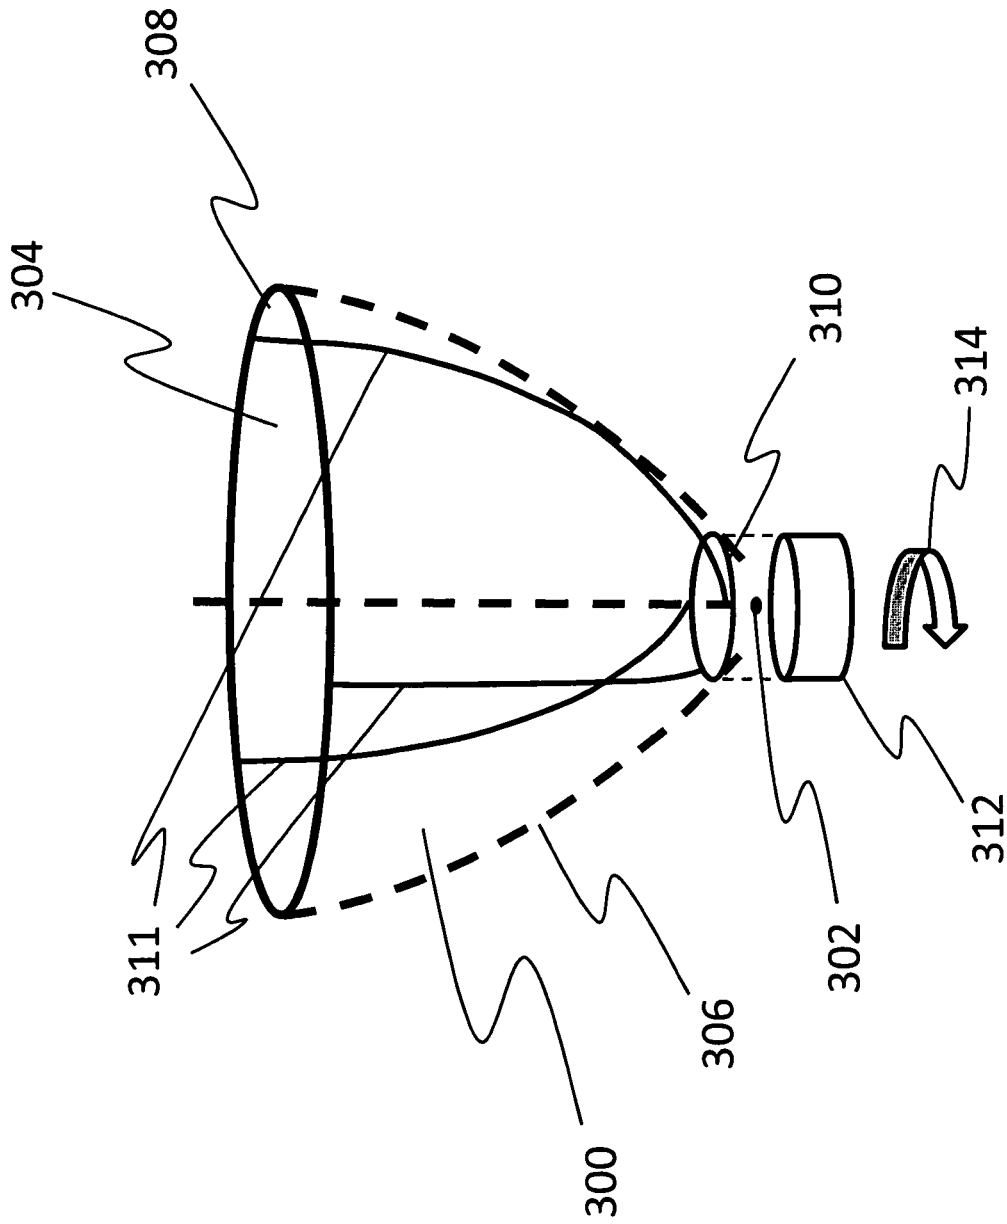


FIG. 3

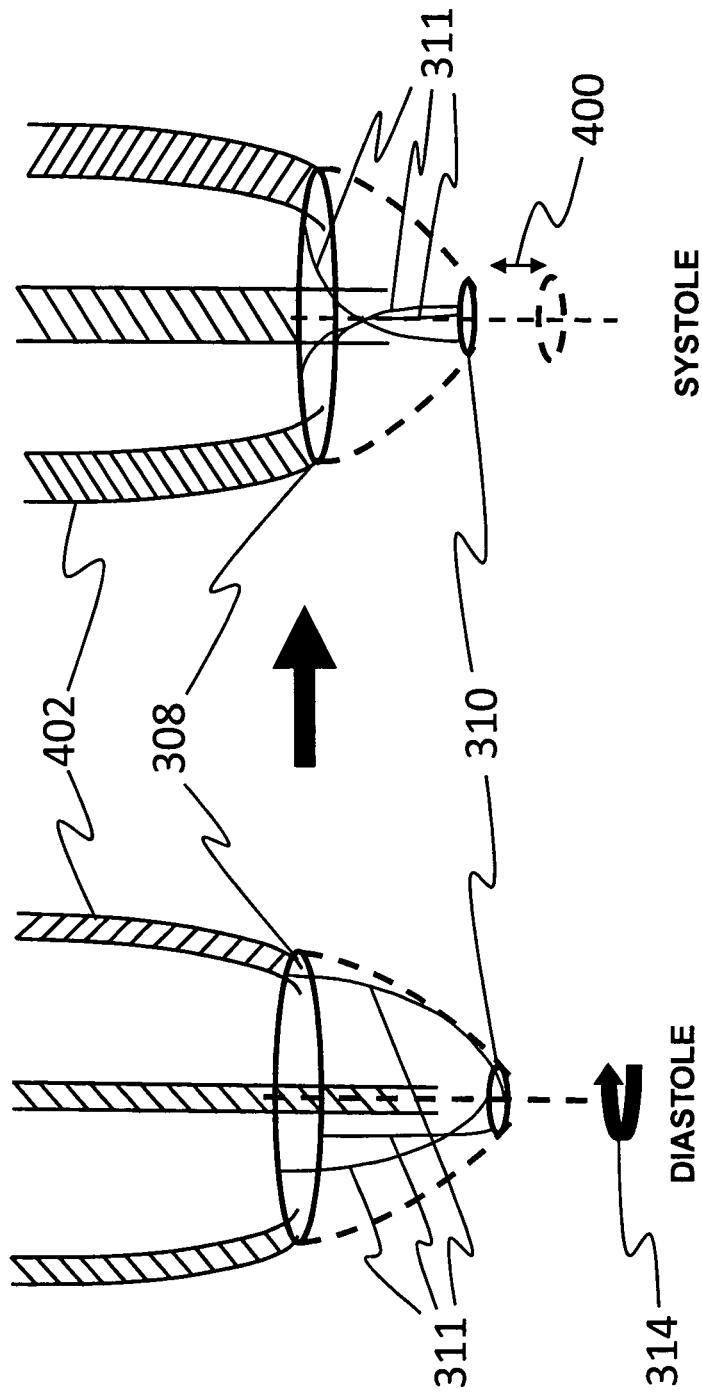


FIG. 4B

FIG. 4A

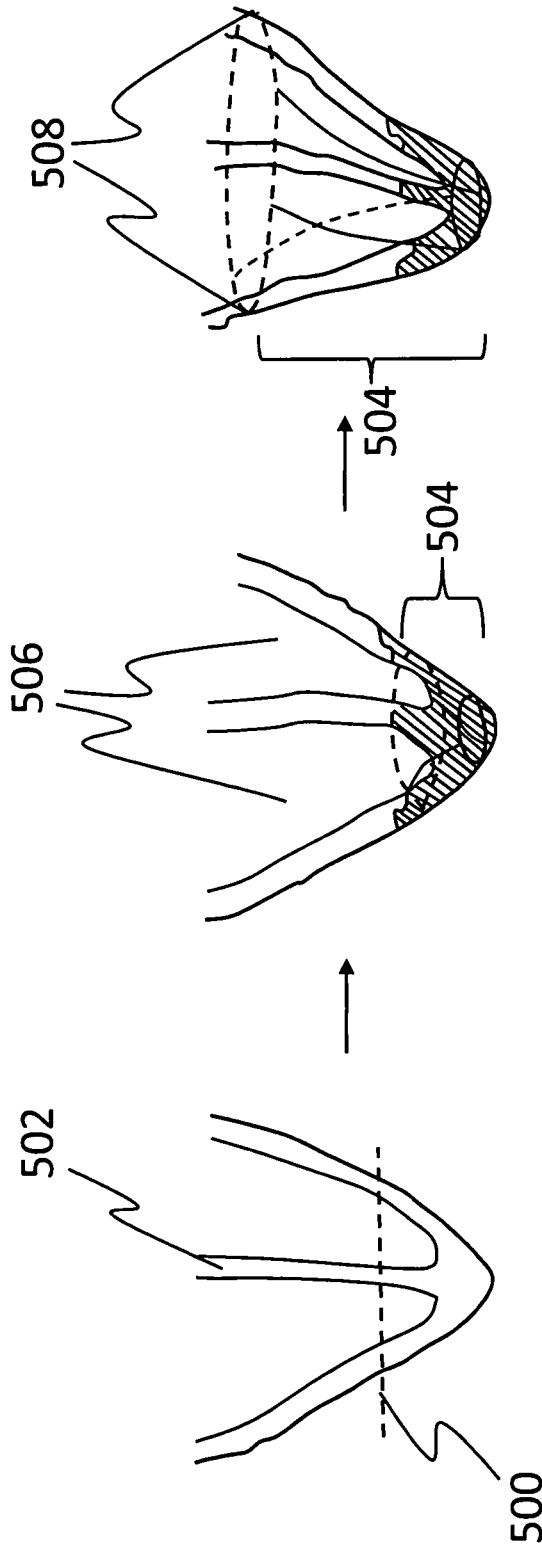


FIG. 5C

FIG. 5B

FIG. 5A



**CARDIAC ASSIST SYSTEM USING HELICAL  
ARRANGEMENT OF CONTRACTILE BANDS  
AND HELICALLY-TWISTING CARDIAC  
ASSIST DEVICE**

PRIORITY CLAIM

The present application is a non-provisional patent application, claiming the benefit of priority of U.S. Provisional Application No. 60/959,297, filed on Jul. 11, 2007, entitled "Method for reinforcing the cardiac pumping function," and U.S. Provisional Application No. 61/010,786, filed on Jan. 11, 2008, entitled "Helically twisting cardiac-apex assist device."

BACKGROUND OF THE INVENTION

(1) Field of Invention

The present invention relates to a system and device for assisting cardiac pumping function and, more specifically, to a system and device which assists the cardiac pumping function through a helical arrangement of contractile members.

(2) Description of Related Art

Methods of assisting cardiac pumping function are known in the art. Prior methods have provided assisted contraction transmitted radially or longitudinally around the heart. These motions, however, do not mimic the natural contractile twisting motions of the heart, resulting in inefficient pumping and strain on the heart.

Thus, a continuing need exists for a cardiac assist device which mimics the natural contractile motions of the heart to achieve a more efficient pumping function.

SUMMARY OF INVENTION

The present invention relates to a system and device for assisting cardiac pumping function and, more specifically, to a system and device which assists the cardiac pumping function through a helical arrangement of contractile members.

In one aspect, the present invention teaches a cardiac assist system comprising at least one contractile elastic band configured for helical arrangement around a periphery of a patient's heart, where upon an actuation the at least one contractile band contracts helically, thereby squeezing the heart and assisting the pumping function of the heart.

In another aspect, the system further comprises at least one elastic band arranged in a shape selected from the group consisting of a helix and a double helix.

In yet another aspect of the system of the present invention, the at least one elastic band is comprised of a material selected from the group consisting of biocompatible elastic, viscoelastic materials, active polymers, shape-memory alloys, natural contractile muscle bands, and artificial contractile muscle bands.

In a further aspect, actuation of the system occurs via specific contraction wave propagation.

In another aspect, the system is configured such that the helical contraction is synchronized with the motion of the heart by a pacemaker.

In yet another aspect, the system further comprises a feedback mechanism for adjusting the contraction based on inputs received from the patient's cardiovascular system, the inputs being selected from the group consisting of ventricular pressure, volume, pulse pressure, ECG, volume, and pace maker signal.

In a further embodiment of the system of the present invention, the at least one contractile band is configured to cover up the infarcted and ischemic areas of the heart's epicardial surface, thereby preventing aneurismal remodeling of the heart.

In another embodiment, the present invention comprises a surgical method for attaching at least one contractile muscle tissue elastic band around a patient's heart in a helical arrangement.

Another aspect of the present invention teaches a helically twisting cardiac-apex assist device comprising an open, inverted, substantially conical chamber having an apex, a base, and an elastic chamber wall, the chamber being of a shape and size appropriate for fitting snugly over the apex of a heart. The device further comprises two rotatable ring portions of different diameters, the ring with the larger diameter circumscribing the base of the conical chamber, and the ring with the smaller diameter located near the apex of the chamber. The device further comprises a plurality of substantially helical connecting elements positioned substantially flush with the chamber wall and connecting the two rotatable ring portions, whereby one ring can be twisted relative to the other, causing the helical connecting elements to deform helically, thereby increasing or decreasing a distance between the two rings, and correspondingly increasing or decreasing a volume of the chamber, thereby providing assistance to the pumping functions of the heart.

In yet another aspect the device further comprises an actuator connected with the ring at the apex of the chamber, the actuator configured for anchoring inside a patient's chest cavity, whereby the actuator powers the twisting motion of one ring relative to the other.

In a further aspect of the device of the present invention, the actuator is selected from a group consisting of a twisting rotor and muscle tissue.

In another aspect, the device is configured such that the actuator is synchronized with the motion of the heart by a pacemaker.

In yet another aspect of the device of the present invention, the ring portions and helical connecting portions are comprised of a material selected from the group consisting of shape memory materials and composite materials.

In another aspect, the elastic chamber wall is comprised of a material selected from the group consisting of biocompatible elastic and viscoelastic material.

The present invention also includes a method for surgical implantation of a helically-twisting cardiac-apex assist device with a heart, the method comprising acts of performing a partial, distal bi-ventriculectomy on the heart, and attaching the device with the heart's ventricles.

In another aspect of the method, in the act of performing the partial, distal bi-ventriculectomy, a patient's ventricular septum and papillary muscles are preserved.

In yet another aspect, the surgical method further comprises the act of attaching the device with another body part for support, the other body part being selected from the group consisting of the sternum and the base of the heart.

Finally, the method of the present invention further comprises the act of attaching a patient's papillary muscles and interventricular septum to the device with preservation of their blood supply.

BRIEF DESCRIPTION OF THE DRAWINGS

The objects, features and advantages of the present invention will be apparent from the following detailed descrip-

tions of the various aspects of the invention in conjunction with reference to the following drawings, where:

FIG. 1A is a front-view illustration showing two possible arrangements of a contractile band grasping a heart;

FIG. 1B is a back view illustration showing two possible arrangements of a contractile band grasping a heart;

FIG. 1C is a bottom view illustration showing two possible arrangements of a contractile band grasping a heart;

FIG. 2 is an illustration showing the contours of heart myofibril structure independent of the heart;

FIG. 3 is an illustration showing the helically-twisting cardiac assist device of the present invention;

FIG. 4A is an illustration showing the helically-twisting cardiac assist device of the present invention in elongated position and attached with a heart;

FIG. 4B is an illustration showing the helically-twisting cardiac assist device of the present invention in contracted position and attached with a heart;

FIG. 5A is an illustration showing a heart with a dotted line indicating the approximate location of the partial, distal bi-ventriculectomy;

FIG. 5B is an illustration showing the helically-twisting cardiac assist device of the present invention attached with the apex of a heart; and

FIG. 5C is an illustration showing the helically-twisting cardiac assist device of the present invention with attachment points to the base of a heart.

#### DETAILED DESCRIPTION

The present invention relates to a system and device for assisting cardiac pumping function and, more specifically, to a system and device which assists the cardiac pumping function through a helical arrangement of contractile members. The following description is presented to enable one of ordinary skill in the art to make and use the invention and to incorporate it in the context of particular applications. Various modifications, as well as a variety of uses in different applications will be readily apparent to those skilled in the art, and the general principles defined herein may be applied to a wide range of embodiments. Thus, the present invention is not intended to be limited to the embodiments presented, but is to be accorded the widest scope consistent with the principles and novel features disclosed herein.

In the following detailed description, numerous specific details are set forth in order to provide a more thorough understanding of the present invention. However, it will be apparent to one skilled in the art that the present invention may be practiced without necessarily being limited to these specific details. In other instances, well-known structures and devices are shown in block diagram form, rather than in detail, in order to avoid obscuring the present invention.

The reader's attention is directed to all papers and documents which are filed concurrently with this specification and which are open to public inspection with this specification, and the contents of all such papers and documents are incorporated herein by reference. All the features disclosed in this specification, (including any accompanying claims, abstract, and drawings) may be replaced by alternative features serving the same, equivalent or similar purpose, unless expressly stated otherwise. Thus, unless expressly stated otherwise, each feature disclosed is only one example of a generic series of equivalent or similar features.

Furthermore, any element in a claim that does not explicitly state "means for" performing a specified function, or "step for" performing a specific function, is not to be interpreted as a "means" or "step" clause as specified in 35

U.S.C. Section 112, Paragraph 6. In particular, the use of "step of" or "act of" in the claims herein is not intended to invoke the provisions of 35 U.S.C. 112, Paragraph 6.

Further, if used, the labels left, right, front, back, top, bottom, forward, reverse, clockwise and counter clockwise have been used for convenience purposes only and are not intended to imply any particular fixed direction. Instead, they are used to reflect relative locations and/or directions between various portions of an object.

#### (1) Introduction

The present invention relates to a system and device for assisting cardiac pumping function and, more specifically, to a system and device which assists the cardiac pumping function through a helical arrangement of contractile members. The description section below is divided into two parts corresponding to the two main embodiments of the present invention. Section (2) below discloses a cardiac assist system using a helical arrangement of contractile bands and surgical method for implanting the same, while section (3) discloses a helically-twisting cardiac assist device and surgical method for implanting the same.

#### (2) Cardiac Assist System Using Helical Arrangement of Contractile Bands

In one aspect, the present invention teaches a cardiac assist system that works based on the contraction of at least one contractile elastic band **100** grasping the heart **102** as shown in FIGS. 1A-C. The contractile band **100** may be arranged in a helix, a double helix, or any other substantially helical arrangement which mimics the natural pumping function of the heart. The arrangements shown in FIGS. 1A-C comprise two possible arrangements of a single contractile band **100** arranged in a double helix around the heart **102**, attached to itself at an attachment point **104**. The helical band arrangement assists both left and right ventricles during diastole to receive blood from the atria more efficiently, and helps both ventricles to eject the blood more effectively during systole and to improve both local and global cardiac function. The elastic bands **100** can be made of any types of biocompatible elastic or viscoelastic materials such as, but not limited to elastomers like Resilin, silicone rubber, or Polyisobutylene. Other materials suitable for the elastic bands are shape-memory alloys, natural contractile muscle bands, and artificial contractile muscle bands. The bands may also have a framework made of shape-memory materials/fibers.

The system works based on the idea that if contraction waves transmit through the bands at optimal angles around the heart, its pumping efficiency would be higher than if the contraction waves transmit radially or longitudinally. The idea for the system is based on naturally occurring myofibril structure, which can be seen in recent MRI data as detailed in Helm, P., et al., Measuring and Mapping Cardiac Fiber and Laminar Architecture Using Diffusion Tensor MR Imaging. Ann NY Acad Sci, 2005. 1047(1): p. 296-307. Unlike the myoplasty concept this system not only assists the heart globally but also reinforces local function. FIG. 2 is an illustration showing the contours of the myofibril structure **204** independent of the heart.

Another aspect of the cardiac assist system is synchronization of the contraction of the contractile bands with the natural heart motion. Synchronization would be made by devices such as, but not limited to, external and/or internal pacemakers. The activation of the band(s) can mimic the Purkinje activation of the cardiac muscle, i.e. starting at the apex and propagating to the periphery, or follow any other specific contraction wave propagation scheme. This system can also have a feedback mechanism where the contraction

waves sent through the bands are adjusted based on inputs received from the heart or vasculature; inputs such as but not limited to blood pressure, volume, ECG, pulse pressure, pace maker signal, etc. As a result the device would be able to self-adjust to changing demands of the heart. In another aspect, the system covers the infarcted/ischemic areas of the epicardial surface of the heart to prevent aneurismal remodeling. The present invention also improves coronary blood flow by accentuating the cardiac motion and pumping function of the heart.

### (3) Helically-Twisting Cardiac Assist Device

In another aspect, the present invention teaches a cardiac assist device that works based on a helically twisting mechanism. The device assists both left and right ventricles during diastole to receive blood from the atria more efficiently, and helps both ventricles to eject the blood more effectively during systole. The shell of the device, as shown in FIG. 3, is an open, inverted, substantially conical chamber **300** having an apex **302**, a base **304**, and an elastic chamber wall **306**, the chamber being of a shape and size appropriate for fitting snugly over the apex of a heart. Inside the conical chamber are two rotatable ring portions of different diameters, the ring with the larger diameter **308** circumscribing the base **304** of the conical chamber **300**, and the ring with the smaller diameter **310** located near the apex **302** of the chamber **300**. A plurality of substantially helical connecting elements **311** connects the two ring portions **308** and **310** and is substantially flush with the chamber wall **306**. The device further comprises an actuator portion **312** connected with the smaller ring **310**, where the actuator **312** is configured for anchoring inside a patient's chest cavity. The actuator **312** powers a twisting motion **314** of one ring relative to the other. The actuator **312** can be a motor such as a twisting rotor, which can be attached anywhere inside the chest, or the actuator **312** can be an internal power source such as latissimus dorsi muscle or any other internal structure. Twisting **314** the rings **308** and **310** in opposite relative directions, as shown in FIGS. 4A-B, results in deviation of the helical elements **311** from their original angles, which increases or decreases the distance **400** between two rings. In the case of increasing distance, the chamber induced dilation results in generation of negative pressure during diastole. In contrast, by decreasing the rings' relative distance, the device provides extra pumping force during systole. FIGS. 4A-B also show the device attached with a heart **402**. Furthermore, the actuation of the device can be synchronized with the motion of the heart by an external or internal pace-maker.

The rings and helical elements of the device can be made of different selections of shape memory material such as nitinol and/or composite materials. The chamber wall can be made of any type of biocompatible elastic or viscoelastic materials such as, but not limited to, elastomers like Resilin, silicone rubber, Polyisobutylene, etc.

The present invention also includes a surgical procedure to implant the device via two or more sequential stages. The first stage, as shown in FIG. 5A, is a partial, distal biventriclectomy **500** with preservation of the anatomical structures such as but not limited to ventricular septum **502** and the papillary muscles. In the second stage, as shown in FIG. 5B, the device **504** is attached to the ventricles **506**. The device **504** can be stitched directly to the ventricles **506** and/or supported by additional connections to other internal organs such as but not limited to the sternum or the base of the heart **508**. The papillary muscles, interventricular septum **502** and the other structures can be attached to the device **504** with preservation of their blood supply.

What is claimed is:

1. A cardiac assist system comprising:

a single contractile elastic band arranged helically around and encircling a periphery of a patient's heart such that the contractile elastic band does not penetrate the patient's heart,

wherein the contractile elastic band is adapted to contract helically upon actuation with such contraction due to a contractile material property of the band such that the heart is squeezed and the pumping function of the heart is assisted, and

wherein the contractile elastic band comprises only two free ends secured to each other at an attachment point.

2. The system of claim 1, wherein the contractile elastic band is arranged in a shape of a helix or a double helix.

3. The system of claim 1, wherein the contractile elastic band consists essentially of a material selected from biocompatible elastic materials, viscoelastic materials, active polymers, shape-memory alloys, natural contractile muscle bands, and artificial contractile muscle bands.

4. The system of claim 1, wherein the contractile elastic band is adapted to contract helically upon actuation that occurs via specific contraction wave propagation.

5. The system of claim 1, where the contractile elastic band covers up the infarcted and ischemic areas of the heart's epicardial surface, thereby preventing aneurismal remodeling of the heart.

6. The system of claim 1, wherein the contractile elastic band overlaps itself.

7. A surgical method comprising the act of attaching a single contractile elastic band around a patient's heart in a helical arrangement encircling the heart such that the contractile elastic band does not penetrate the heart, wherein only the contractile elastic band is implanted during the surgical procedure, and wherein the contractile elastic band comprises only two free ends secured to each other at an attachment point.

8. The method of claim 7, wherein the contractile elastic band is adapted to contract helically with such contraction due to a contractile material property of the band.

9. The method of claim 8, wherein the contractile elastic band consists essentially of a material selected from biocompatible elastic materials, viscoelastic materials, active polymer, natural contractile muscle bands, shape memory alloys, and artificial contractile muscle bands.

10. The method of claim 7, further comprising overlapping the contractile elastic band with itself.

11. The method of claim 7, wherein the contractile band is adapted to contract helically and assist ventricular ejection of blood during systole.

12. The method of claim 11, wherein attaching the single contractile elastic band around the patient's heart in the helical arrangement encircling the heart is performed such that the contractile elastic band contracts helically and assists ventricular ejection of blood during systole.

13. A cardiac assist system consisting essentially of:

a single contractile elastic band assembly arranged helically around and encircling a periphery of a patient's heart such that the contractile elastic band does not penetrate the patient's heart, wherein the contractile elastic band comprises only two free ends secured to each other at an attachment point, and where upon actuation the contractile band contracts helically with such contraction due to a contractile material property of the band, thereby squeezing the heart and assisting the pumping function of the heart.

14. The system of claim 13, wherein the contractile elastic band overlaps itself.

15. The system of claim 1, wherein the contractile band is adapted to contract helically and assist ventricular ejection of blood during systole.

5

16. The system of claim 13, wherein the single contractile band is adapted to contract helically and assist ventricular ejection of blood during systole.

\* \* \* \* \*