



US008133270B2

(12) **United States Patent**  
**Kheradvar et al.**

(10) **Patent No.:** **US 8,133,270 B2**  
(45) **Date of Patent:** **Mar. 13, 2012**

(54) **IN-SITU FORMATION OF A VALVE**

(75) Inventors: **Arash Kheradvar**, Blythewood, SC (US); **Morteza Gharib**, San Marino, CA (US)

(73) Assignee: **California Institute of Technology**, Pasadena, CA (US)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 874 days.

(21) Appl. No.: **12/008,109**

(22) Filed: **Jan. 8, 2008**

(65) **Prior Publication Data**

US 2008/0195199 A1 Aug. 14, 2008

**Related U.S. Application Data**

(60) Provisional application No. 60/879,288, filed on Jan. 8, 2007, provisional application No. 60/930,458, filed on May 16, 2007.

(51) **Int. Cl.**

*A61F 2/24* (2006.01)

*A61F 2/06* (2006.01)

(52) **U.S. Cl.** ..... **623/2.11**; 623/1.26

(58) **Field of Classification Search** ..... 623/2.11, 623/2.12, 2.13, 2.14, 2.15, 2.16, 2.17, 2.18, 623/1.19, 1.26, 23.68, 1.24; 606/191, 192, 606/194

See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

3,671,979 A 6/1972 Mouloupoulos  
4,291,420 A 9/1981 Reul  
4,451,936 A 6/1984 Carpentier

4,692,164 A 9/1987 Dzemeshkevich  
4,759,758 A 7/1988 Gabbay  
4,787,901 A 11/1988 Baykut  
4,790,843 A 12/1988 Carpentier  
4,851,001 A 7/1989 Taheri  
4,872,874 A 10/1989 Taheri  
4,935,030 A 6/1990 Alonso  
4,994,077 A 2/1991 Dobben  
5,002,567 A 3/1991 Bona et al.  
5,032,128 A 7/1991 Alonso  
5,037,434 A 8/1991 Lane  
5,080,668 A 1/1992 Bolz

(Continued)

**FOREIGN PATENT DOCUMENTS**

EP 0 380 666 8/1990

(Continued)

**OTHER PUBLICATIONS**

PCT International Search Report and the Written Opinion of The International Searching Authority.

(Continued)

*Primary Examiner* — Corrine M McDermott


*Assistant Examiner* — Christina Lauer

(74) *Attorney, Agent, or Firm* — Tope-McKay & Associates; Marcus Risso

(57) **ABSTRACT**

The present invention satisfies the long felt need for a more compact and durable valve which may be formed in situ. The present invention provides a self-deployable valve system, a method of delivery, and a method of manufacturing for the self-deployable valve system. The present invention delivers the necessary components for forming a complete valve system in situ. The collapsed subcomponents of the system lack any functional characteristics commonly associated with a valve before being expanded. However, once expanded, the system is transformed into a competent valve for use in a wide variety of applications.

**15 Claims, 10 Drawing Sheets**

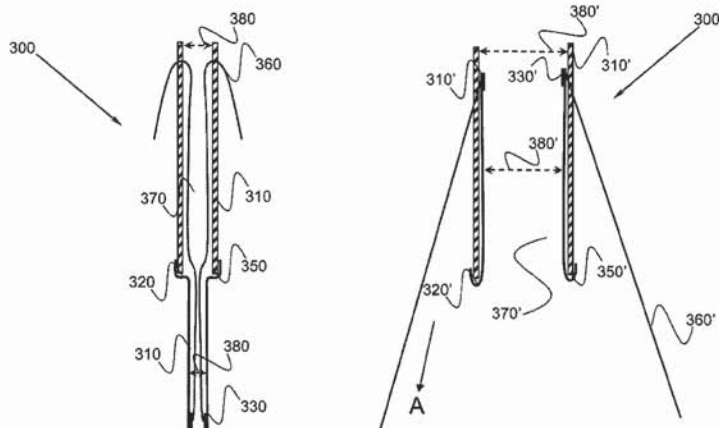

U.S. PATENT DOCUMENTS							
5,141,491	A	8/1992	Bowald	6,666,886	B1	12/2003	Tranquillo et al.
5,163,953	A	11/1992	Vince	6,669,725	B2	12/2003	Scott
5,219,355	A	6/1993	Parodi et al.	6,673,109	B2	1/2004	Cox
5,254,127	A	10/1993	Wholey et al.	6,676,698	B2	1/2004	McGuckin, Jr. et al.
5,282,847	A	2/1994	Trescony	6,676,702	B2	1/2004	Mathis
5,327,774	A	7/1994	Nguyen et al.	6,682,558	B2	1/2004	Tu et al.
5,332,402	A	7/1994	Teitelbaum	6,682,559	B2	1/2004	Myers et al.
5,360,444	A	11/1994	Kusuhara	6,685,739	B2	2/2004	DiMatteo et al.
5,370,685	A	12/1994	Stevens	6,692,512	B2	2/2004	Jang
5,397,351	A	3/1995	Pavcnik	6,695,866	B1	2/2004	Kuehn et al.
5,411,552	A	5/1995	Andersen	6,695,878	B2	2/2004	McGuckin, Jr. et al.
5,445,626	A	8/1995	Gigante	6,709,456	B2	3/2004	Langberg et al.
5,469,868	A	11/1995	Reger	6,709,457	B1	3/2004	Otte et al.
5,480,423	A	1/1996	Ravenscroft et al.	6,716,241	B2	4/2004	Wildner et al.
5,500,014	A	3/1996	Quijano	6,716,244	B2	4/2004	Klaco
5,545,214	A	8/1996	Stevens	6,719,767	B1	4/2004	Kimblad
5,554,185	A	9/1996	Block et al.	6,719,784	B2	4/2004	Henderson
5,571,175	A	11/1996	Vanney	6,719,786	B2	4/2004	Ryan et al.
5,591,195	A	1/1997	Taheri	6,719,787	B2	4/2004	Cox
5,607,464	A	3/1997	Trescony	6,719,788	B2	4/2004	Cox
5,609,626	A	3/1997	Quijano	6,719,789	B2	4/2004	Cox
5,643,208	A	7/1997	Parodi	6,719,790	B2	4/2004	Brendzel et al.
5,693,087	A	12/1997	Parodi	6,723,038	B1	4/2004	Schroeder et al.
5,713,953	A	2/1998	Vallana et al.	6,723,122	B2	4/2004	Yang et al.
5,716,370	A	2/1998	Williamson, IV et al.	6,723,123	B1	4/2004	Kazatchkov et al.
5,735,859	A	4/1998	Fischell et al.	6,726,715	B2	4/2004	Sutherland
5,741,326	A	4/1998	Solovay	6,726,716	B2	4/2004	Marquez
5,741,333	A	4/1998	Frid	6,726,717	B2	4/2004	Alfieri et al.
5,749,890	A	5/1998	Shaknovich	6,730,118	B2	5/2004	Spenser
5,800,506	A	9/1998	Perouse	6,730,121	B2	5/2004	Ortiz et al.
5,824,061	A	10/1998	Quijano et al.	6,730,122	B1	5/2004	Pan et al.
5,824,064	A	10/1998	Taheri	6,736,791	B1	5/2004	Tu et al.
5,840,081	A	11/1998	Andersen	6,736,845	B2	5/2004	Marquez et al.
5,855,597	A	1/1999	Jayaraman	6,736,846	B2	5/2004	Cox
5,855,601	A	1/1999	Bessler	6,749,630	B2	6/2004	McCarthy et al.
5,855,602	A	1/1999	Angell	6,752,813	B2	6/2004	Goldfarb et al.
5,879,320	A	3/1999	Cazenave	6,752,828	B2	6/2004	Thornton
5,895,419	A	4/1999	Tweden et al.	6,755,857	B2	6/2004	Peterson et al.
5,910,170	A	6/1999	Reimink et al.	6,761,734	B2	7/2004	Suhr
5,925,063	A	7/1999	Khosravi	6,761,735	B2	7/2004	Eberhardt et al.
5,954,766	A *	9/1999	Zadno-Azizi	6,764,494	B2	7/2004	Menz et al.
5,957,949	A *	9/1999	Leonhardt	6,764,508	B1	7/2004	Roehe et al.
6,010,531	A	1/2000	Donlon et al.	6,764,509	B2	7/2004	Chinn et al.
6,042,607	A	3/2000	Williamson, IV et al.	6,764,510	B2	7/2004	Vidlund et al.
6,077,298	A	6/2000	Tu et al.	6,767,362	B2	7/2004	Schreck
6,106,550	A *	8/2000	Magovern	6,769,434	B2	8/2004	Liddicoat et al.
6,106,551	A	8/2000	Crossett et al.	6,770,083	B2	8/2004	Sequin
6,132,473	A	10/2000	Williams	6,780,164	B2	8/2004	Bergheim et al.
6,139,575	A	10/2000	Shu et al.	6,780,200	B2	8/2004	Jansen
6,168,614	B1 *	1/2001	Andersen	6,786,924	B2	9/2004	Ryan et al.
6,206,911	B1 *	3/2001	Milo	6,786,925	B1	9/2004	Schoon et al.
6,283,127	B1 *	9/2001	Sterman	6,790,229	B1	9/2004	Berrekouw
6,287,334	B1	9/2001	Moll et al.	6,790,230	B2	9/2004	Beyersdorf et al.
6,299,637	B1	10/2001	Shaolian et al.	6,790,231	B2	9/2004	Liddicoat et al.
6,312,447	B1	11/2001	Grimes	6,793,673	B2	9/2004	Kowalsky et al.
6,355,030	B1	3/2002	Aldrich et al.	6,797,000	B2	9/2004	Simpson et al.
6,402,780	B2	6/2002	Williamson, IV et al.	6,797,001	B2	9/2004	Mathis et al.
6,419,696	B1	7/2002	Ortiz et al.	6,797,002	B2	9/2004	Spence et al.
6,425,916	B1 *	7/2002	Garrison et al. .... 623/2.11	6,802,860	B2	10/2004	Cosgrove et al.
6,440,164	B1	8/2002	DiMatteo et al.	6,805,710	B2	10/2004	Bolling et al.
6,451,054	B1	9/2002	Stevens	6,805,711	B2	10/2004	Quijano et al.
6,454,799	B1	9/2002	Schreck	6,810,882	B2	11/2004	Langberg et al.
6,458,153	B1	10/2002	Bailey	6,821,297	B2	11/2004	Snyders
6,461,366	B1	10/2002	Seguin	6,824,562	B2	11/2004	Mathis et al.
6,482,228	B1	11/2002	Norred	6,830,584	B1 *	12/2004	Seguin
6,503,272	B2	1/2003	Duerig et al.	6,830,585	B1 *	12/2004	Artof
6,508,833	B2	1/2003	Pavcnik et al.	6,837,902	B2	1/2005	Nguyen et al.
6,530,952	B2 *	3/2003	Vesely	6,840,246	B2	1/2005	Downing
6,564,805	B2	5/2003	Garrison et al.	6,840,957	B2	1/2005	DiMatteo et al.
6,569,196	B1 *	5/2003	Vesely	6,846,324	B2	1/2005	Stobie
6,582,462	B1 *	6/2003	Andersen	6,846,325	B2	1/2005	Liddicoat
6,602,286	B1	8/2003	Strecker	6,858,039	B2	2/2005	McCarthy
6,629,534	B1	10/2003	St. Goar et al.	6,869,444	B2	3/2005	Gabbay
6,635,085	B1	10/2003	Caffey et al.	6,872,226	B2	3/2005	Cali et al.
6,638,239	B1	10/2003	Bergheim et al.	6,875,224	B2	4/2005	Grimes
6,652,578	B2 *	11/2003	Baily	6,875,230	B1	4/2005	Morita et al.
6,666,841	B2	12/2003	Gharib et al.	6,875,231	B2	4/2005	Anduiza et al.
6,666,885	B2	12/2003	Moe	6,881,199	B2	4/2005	Wilk et al.
				6,881,224	B2	4/2005	Kruse et al.



## US 8,133,270 B2

Page 3

6,883,522	B2	4/2005	Spence et al.	7,090,695	B2	8/2006	Solem et al.
6,890,350	B1	5/2005	Walak	7,101,396	B2	9/2006	Artof
6,890,352	B1	5/2005	Lentell	7,331,991	B2	2/2008	Kheradvar et al.
6,890,353	B2	5/2005	Cohn et al.	7,967,853	B2	6/2011	Eidenschink et al.
6,893,459	B1	5/2005	Macoviak	2002/0013571	A1	1/2002	Goldfarb et al.
6,893,460	B2	5/2005	Spence et al.	2002/0026216	A1	2/2002	Grimes
6,896,690	B1*	5/2005	Lambrecht	2002/0082630	A1	6/2002	Menz et al.
6,896,700	B2	5/2005	Lu et al.	2002/0123802	A1	9/2002	Snyders
6,902,576	B2	6/2005	Drasler et al.	2002/0151970	A1	10/2002	Garrison et al.
6,908,478	B2	6/2005	Alferness et al.	2002/0183835	A1	12/2002	Taylor et al.
6,908,481	B2*	6/2005	Cribier	2002/0183838	A1	12/2002	Liddicoat et al.
6,911,043	B2	6/2005	Myers et al.	2002/0198594	A1	12/2002	Schreck
6,913,608	B2	7/2005	Liddicoat et al.	2003/0014104	A1	1/2003	Cribier
6,916,338	B2	7/2005	Speziah	2003/0050694	A1	3/2003	Yang et al.
6,918,917	B1	7/2005	Nguyen et al.	2003/0130729	A1	7/2003	Paniagua et al.
6,921,407	B2	7/2005	Nguyen et al.	2003/0163194	A1	8/2003	Quijano et al.
6,921,811	B2	7/2005	Zamora et al.	2003/0167071	A1	9/2003	Martin et al.
6,926,715	B1	8/2005	Hauck et al.	2003/0171806	A1	9/2003	Mathis et al.
6,926,730	B1	8/2005	Nguyen et al.	2003/0199975	A1	10/2003	Gabbay
6,929,653	B2	8/2005	Strecker	2003/0229394	A1	12/2003	Ogle et al.
6,932,838	B2	8/2005	Schwartz et al.	2003/0229395	A1	12/2003	Cox
6,936,067	B2	8/2005	Buchanan	2003/0233142	A1	12/2003	Morales et al.
6,939,359	B2	9/2005	Tu et al.	2003/0236568	A1	12/2003	Hojeibane et al.
6,942,694	B2	9/2005	Liddicoat et al.	2003/0236569	A1	12/2003	Mathis et al.
6,945,957	B2	9/2005	Freyman	2004/0002719	A1	1/2004	Oz et al.
6,945,978	B1	9/2005	Hyde	2004/0003819	A1	1/2004	St. Goar et al.
6,945,996	B2	9/2005	Sedransk	2004/0010305	A1	1/2004	Alferness et al.
6,945,997	B2	9/2005	Huynh et al.	2004/0015230	A1	1/2004	Moll et al.
6,949,122	B2	9/2005	Adams et al.	2004/0015232	A1	1/2004	Shu et al.
6,951,571	B1*	10/2005	Srivastava	2004/0015233	A1	1/2004	Jansen
6,951,573	B1	10/2005	Dilling	2004/0019374	A1	1/2004	Hojeibane et al.
6,955,656	B2	10/2005	Bergheim et al.	2004/0019377	A1	1/2004	Taylor et al.
6,955,689	B2	10/2005	Ryan et al.	2004/0019378	A1	1/2004	Hlavka et al.
6,958,076	B2	10/2005	Acosta et al.	2004/0024447	A1	2/2004	Haverich
6,962,605	B2	11/2005	Cosgrove et al.	2004/0024451	A1	2/2004	Johnson et al.
6,964,682	B2	11/2005	Nguyen-Thien-Nhon et al.	2004/0024452	A1	2/2004	Kruse et al.
6,964,683	B2	11/2005	Kowalsky et al.	2004/0030321	A1	2/2004	Fangrow, Jr.
6,964,684	B2	11/2005	Ortiz et al.	2004/0030381	A1	2/2004	Shu
6,966,925	B2	11/2005	Stobie	2004/0030382	A1	2/2004	St. Goar et al.
6,966,926	B2	11/2005	Mathis	2004/0030405	A1	2/2004	Carpentier et al.
6,974,464	B2	12/2005	Quijano et al.	2004/0034380	A1	2/2004	Woolfson et al.
6,974,474	B2	12/2005	Pavcnik et al.	2004/0034411	A1	2/2004	Quijano et al.
6,974,476	B2*	12/2005	McGuckin	2004/0039436	A1	2/2004	Spenser et al.
6,976,995	B2	12/2005	Mathis et al.	2004/0039442	A1	2/2004	St. Goar et al.
6,979,350	B2	12/2005	Moll et al.	2004/0039443	A1	2/2004	Solem et al.
6,986,775	B2	1/2006	Morales et al.	2004/0044350	A1	3/2004	Martin et al.
6,989,027	B2	1/2006	Allen et al.	2004/0044365	A1	3/2004	Bachman
6,989,028	B2	1/2006	Lashinski et al.	2004/0044403	A1	3/2004	Bischoff et al.
6,997,950	B2	2/2006	Chawla	2004/0049207	A1	3/2004	Goldfarb et al.
6,997,951	B2	2/2006	Solem et al.	2004/0049211	A1	3/2004	Tremulis et al.
7,004,176	B2	2/2006	Lau	2004/0049266	A1	3/2004	Anduiza et al.
7,007,396	B2	3/2006	Rudko et al.	2004/0059351	A1	3/2004	Eigler et al.
7,007,698	B2	3/2006	Thornton	2004/0059411	A1	3/2004	Strecker
7,011,669	B2	3/2006	Kimblad	2004/0059412	A1	3/2004	Lytile, IV et al.
7,011,681	B2	3/2006	Vesely	2004/0060161	A1	4/2004	Leal et al.
7,011,682	B2	3/2006	Lahsinski et al.	2004/0073301	A1	4/2004	Donlon et al.
7,018,406	B2	3/2006	Saguin et al.	2004/0073302	A1	4/2004	Rourke et al.
7,018,407	B1	3/2006	Wright et al.	2004/0078072	A1	4/2004	Tu et al.
7,018,408	B2	3/2006	Bailey et al.	2004/0078074	A1	4/2004	Anderson et al.
7,022,134	B1	4/2006	Quijano et al.	2004/0082910	A1	4/2004	Constantz et al.
7,025,780	B2	4/2006	Gabbay	2004/0082923	A1	4/2004	Fjeld
7,033,390	B2	4/2006	Johnson et al.	2004/0082991	A1	4/2004	Nguyen et al.
7,037,333	B2	5/2006	Myers et al.	2004/0087975	A1	5/2004	Lucatero et al.
7,037,334	B1	5/2006	Hlavka et al.	2004/0088045	A1	5/2004	Cox
7,041,128	B2	5/2006	McGuckin, Jr. et al.	2004/0088046	A1	5/2004	Speziali
7,041,132	B2	5/2006	Quijano et al.	2004/0092858	A1	5/2004	Wilson et al.
7,044,966	B2	5/2006	Svanidze	2004/0093060	A1	5/2004	Sequin et al.
7,044,967	B1	5/2006	Solem et al.	2004/0093070	A1	5/2004	Hojeibane et al.
7,048,754	B2	5/2006	Martin et al.	2004/0093080	A1	5/2004	Helmus et al.
7,048,757	B2	5/2006	Shaknovich	2004/0097979	A1	5/2004	Svanidze et al.
7,052,487	B2	5/2006	Cohn et al.	2004/0098098	A1	5/2004	McGuckin, Jr. et al.
7,052,507	B2	5/2006	Wakuda et al.	2004/0098112	A1	5/2004	DiMatteo et al.
7,063,722	B2	6/2006	Marquez	2004/0102839	A1	5/2004	Cohn et al.
7,066,954	B2	6/2006	Ryan et al.	2004/0102840	A1	5/2004	Solem et al.
7,070,616	B2	7/2006	Majercak et al.	2004/0102842	A1	5/2004	Jansen
7,077,862	B2	7/2006	Vidlund et al.	2004/0106976	A1	6/2004	Bailey et al.
7,081,131	B2	7/2006	Thornton	2004/0106990	A1	6/2004	Spence et al.
7,087,064	B1	8/2006	Hyde	2004/0106991	A1	6/2004	Hopkins et al.
7,089,051	B2	8/2006	Javerud et al.	2004/0111096	A1	6/2004	Tu et al.



2004/0117009	A1	6/2004	Cali et al.	2004/0260322	A1	12/2004	Rudko et al.
2004/0122448	A1	6/2004	Levine	2004/0260389	A1	12/2004	Case et al.
2004/0122512	A1	6/2004	Navia et al.	2004/0260390	A1	12/2004	Sarac et al.
2004/0122513	A1	6/2004	Navia et al.	2004/0260393	A1	12/2004	Rahdert et al.
2004/0122514	A1	6/2004	Fogarty et al.	2004/0260394	A1	12/2004	Douk et al.
2004/0122515	A1	6/2004	Chu	2004/0267357	A1	12/2004	Allen et al.
2004/0122516	A1	6/2004	Fogarty et al.	2005/0004583	A1	1/2005	Oz et al.
2004/0127979	A1	7/2004	Wilson et al.	2005/0004667	A1	1/2005	Swinford et al.
2004/0127980	A1	7/2004	Kowalsky et al.	2005/0010285	A1	1/2005	Lambrech et al.
2004/0127981	A1	7/2004	Rahdert et al.	2005/0010287	A1	1/2005	Macoviak et al.
2004/0127982	A1	7/2004	Machold et al.	2005/0015112	A1	1/2005	Cohn et al.
2004/0133220	A1	7/2004	Lashinski et al.	2005/0021056	A1	1/2005	St. Goar et al.
2004/0133267	A1	7/2004	Lane	2005/0021136	A1	1/2005	Xie et al.
2004/0133273	A1	7/2004	Cox	2005/0027261	A1	2/2005	Wever et al.
2004/0138742	A1	7/2004	Myers et al.	2005/0027348	A1	2/2005	Case et al.
2004/0138743	A1	7/2004	Myers et al.	2005/0027351	A1	2/2005	Reuter et al.
2004/0138744	A1	7/2004	Lashinski et al.	2005/0027353	A1	2/2005	Alferness et al.
2004/0138745	A1	7/2004	Macoviak et al.	2005/0033398	A1	2/2005	Sequin
2004/0148018	A1	7/2004	Carpentier et al.	2005/0033419	A1	2/2005	Alferness et al.
2004/0148019	A1	7/2004	Vidlund et al.	2005/0033446	A1	2/2005	Deem et al.
2004/0148020	A1	7/2004	Vidlund et al.	2005/0038506	A1	2/2005	Webler et al.
2004/0153052	A1	8/2004	Mathis	2005/0038507	A1	2/2005	Alferness et al.
2004/0153146	A1	8/2004	Lashinski et al.	2005/0043790	A1	2/2005	Seguin
2004/0153147	A1	8/2004	Mathis	2005/0043792	A1	2/2005	Solem et al.
2004/0158321	A1	8/2004	Reuter et al.	2005/0049679	A1	3/2005	Taylor et al.
2004/0162610	A1	8/2004	Liska et al.	2005/0049692	A1	3/2005	Numamoto et al.
2004/0167539	A1	8/2004	Keuhn et al.	2005/0049696	A1	3/2005	Siess et al.
2004/0167620	A1	8/2004	Ortiz et al.	2005/0049697	A1	3/2005	Sievers
2004/0172046	A1	9/2004	Hlavka et al.	2005/0054977	A1	3/2005	Laird et al.
2004/0176839	A1	9/2004	Huynh et al.	2005/0055079	A1	3/2005	Duran
2004/0176840	A1	9/2004	Langberg et al.	2005/0055087	A1	3/2005	Starksen
2004/0181238	A1	9/2004	Zarbatany et al.	2005/0055088	A1	3/2005	Liddicoat et al.
2004/0186444	A1	9/2004	Daly et al.	2005/0055089	A1	3/2005	Macoviak et al.
2004/0186558	A1	9/2004	Pavcnik et al.	2005/0060029	A1	3/2005	Le et al.
2004/0186561	A1	9/2004	McGuckin, Jr. et al.	2005/0060030	A1	3/2005	Lashinski et al.
2004/0186563	A1	9/2004	Lobbi	2005/0065460	A1	3/2005	Laird
2004/0186565	A1	9/2004	Schreck	2005/0065550	A1	3/2005	Starksen et al.
2004/0186566	A1	9/2004	Hindrichs et al.	2005/0065594	A1	3/2005	DiMatteo et al.
2004/0193191	A1	9/2004	Starksen et al.	2005/0065597	A1	3/2005	Lansac
2004/0193253	A1	9/2004	Thorpe et al.	2005/0070998	A1	3/2005	Rourke et al.
2004/0193260	A1	9/2004	Alferness et al.	2005/0075584	A1	4/2005	Cali
2004/0199155	A1	10/2004	Mollenauer	2005/0075659	A1	4/2005	Realyvasquez et al.
2004/0199183	A1	10/2004	Oz et al.	2005/0075662	A1	4/2005	Pedersen et al.
2004/0199191	A1	10/2004	Schwartz	2005/0075712	A1	4/2005	Biancucci et al.
2004/0204758	A1	10/2004	Eberhardt et al.	2005/0075713	A1	4/2005	Biancucci et al.
2004/0206363	A1	10/2004	McCarthy et al.	2005/0075717	A1	4/2005	Nguyen et al.
2004/0210240	A1	10/2004	Saint	2005/0075718	A1	4/2005	Nguyen et al.
2004/0210301	A1	10/2004	Obermiller	2005/0075719	A1	4/2005	Bergheim
2004/0210303	A1	10/2004	Sedransk	2005/0075720	A1	4/2005	Nguyen et al.
2004/0210304	A1	10/2004	Sequin et al.	2005/0075723	A1	4/2005	Schroeder et al.
2004/0210305	A1	10/2004	Shu et al.	2005/0075724	A1	4/2005	Svanidze et al.
2004/0210306	A1	10/2004	Quijano et al.	2005/0075725	A1	4/2005	Rowe
2004/0210307	A1	10/2004	Khairkhahan	2005/0075726	A1	4/2005	Svanidze et al.
2004/0215333	A1	10/2004	Duran et al.	2005/0075729	A1	4/2005	Nguyen et al.
2004/0215339	A1	10/2004	Drasler et al.	2005/0075730	A1	4/2005	Myers et al.
2004/0220654	A1	11/2004	Mathis et al.	2005/0075731	A1*	4/2005	Artof et al. .... 623/2.18
2004/0220657	A1	11/2004	Nieminen et al.	2005/0080483	A1	4/2005	Solem et al.
2004/0225322	A1	11/2004	Garrison et al.	2005/0085900	A1	4/2005	Case et al.
2004/0225344	A1	11/2004	Hoffa et al.	2005/0085903	A1	4/2005	Lau
2004/0225348	A1	11/2004	Case et al.	2005/0085904	A1	4/2005	Lemmon
2004/0225352	A1	11/2004	Osborne et al.	2005/0090846	A1	4/2005	Pedersen et al.
2004/0225353	A1	11/2004	McGuckin, Jr. et al.	2005/0096735	A1	5/2005	Hojeibane et al.
2004/0225354	A1	11/2004	Allen et al.	2005/0096738	A1	5/2005	Cali et al.
2004/0225355	A1	11/2004	Stevens	2005/0096739	A1	5/2005	Cao
2004/0225356	A1	11/2004	Frater	2005/0096740	A1	5/2005	Langberg et al.
2004/0230117	A1	11/2004	Tosaya et al.	2005/0101975	A1	5/2005	Nguyen et al.
2004/0230297	A1	11/2004	Thornton	2005/0102026	A1	5/2005	Turner et al.
2004/0236411	A1	11/2004	Sarac et al.	2005/0107810	A1	5/2005	Morales et al.
2004/0236418	A1	11/2004	Stevens	2005/0107811	A1	5/2005	Starksen et al.
2004/0236419	A1	11/2004	Milo	2005/0107812	A1	5/2005	Starksen et al.
2004/0243153	A1	12/2004	Liddicoat et al.	2005/0107872	A1	5/2005	Mensah et al.
2004/0243219	A1	12/2004	Fischer et al.	2005/0113910	A1	5/2005	Paniagua et al.
2004/0243227	A1	12/2004	Starksen et al.	2005/0119673	A1	6/2005	Gordon et al.
2004/0243228	A1	12/2004	Kowalsky et al.	2005/0119734	A1	6/2005	Spence et al.
2004/0243230	A1	12/2004	Navia et al.	2005/0119735	A1	6/2005	Spence et al.
2004/0254600	A1	12/2004	Zarbatany et al.	2005/0125011	A1	6/2005	Spence et al.
2004/0254636	A1	12/2004	Flagle et al.	2005/0131438	A1	6/2005	Cohn
2004/0260276	A1	12/2004	Rudko et al.	2005/0137449	A1	6/2005	Nieminen et al.
2004/0260317	A1	12/2004	Bloom et al.	2005/0137450	A1	6/2005	Aronson et al.



2005/0137451	A1	6/2005	Gordon et al.	2005/0267565	A1	12/2005	Dave et al.
2005/0137676	A1	6/2005	Richardson et al.	2005/0267571	A1	12/2005	Spence et al.
2005/0137681	A1	6/2005	Shoemaker et al.	2005/0267573	A9	12/2005	Macoviak et al.
2005/0137682	A1	6/2005	Justino	2005/0267574	A1	12/2005	Cohn et al.
2005/0137685	A1	6/2005	Nieminen et al.	2005/0272969	A1	12/2005	Alferness et al.
2005/0137686	A1	6/2005	Salahieh et al.	2005/0273160	A1	12/2005	Lashinski et al.
2005/0137688	A1	6/2005	Salahieh et al.	2005/0278015	A1	12/2005	Dave et al.
2005/0137689	A1	6/2005	Salahieh et al.	2005/0283178	A1	12/2005	Flagle et al.
2005/0137690	A1	6/2005	Salahieh et al.	2005/0283231	A1*	12/2005	Haug et al. .... 623/2.11
2005/0137691	A1	6/2005	Salahieh et al.	2005/0288779	A1	12/2005	Shaoulian et al.
2005/0137692	A1	6/2005	Haug et al.	2006/0000715	A1	1/2006	Whitcher et al.
2005/0137693	A1	6/2005	Haug et al.	2006/0004439	A1	1/2006	Spenser et al.
2005/0137694	A1	6/2005	Haug et al.	2006/0004442	A1	1/2006	Spenser et al.
2005/0137696	A1	6/2005	Salahieh et al.	2006/0009841	A1	1/2006	McGuckin et al.
2005/0137697	A1	6/2005	Salahieh et al.	2006/0009842	A1	1/2006	Huynh et al.
2005/0137698	A1	6/2005	Salahieh et al.	2006/0013805	A1	1/2006	Hebbel et al.
2005/0137699	A1	6/2005	Salahieh et al.	2006/0013855	A1	1/2006	Carpenter et al.
2005/0137700	A1	6/2005	Spence et al.	2006/0015136	A1	1/2006	Besselink
2005/0137701	A1	6/2005	Salahieh et al.	2006/0015178	A1	1/2006	Moaddeb et al.
2005/0137702	A1	6/2005	Haug et al.	2006/0015179	A1	1/2006	Bulman-Fleming et al.
2005/0143807	A1	6/2005	Pavcnik et al.	2006/0020275	A1	1/2006	Goldfarb et al.
2005/0143809	A1	6/2005	Salahieh et al.	2006/0020327	A1	1/2006	Lashinski et al.
2005/0143810	A1	6/2005	Dauner et al.	2006/0020332	A1	1/2006	Lashinski et al.
2005/0143811	A1	6/2005	Realyvasquez	2006/0020334	A1	1/2006	Lashinski et al.
2005/0149014	A1	7/2005	Hauck et al.	2006/0020335	A1	1/2006	Kowalsky et al.
2005/0149179	A1	7/2005	Mathis et al.	2006/0020336	A1	1/2006	Liddicoat
2005/0149180	A1	7/2005	Mathis et al.	2006/0025750	A1	2/2006	Starksen et al.
2005/0149181	A1	7/2005	Eberhardt	2006/0025784	A1	2/2006	Starksen et al.
2005/0159810	A1	7/2005	Filsoufi	2006/0025787	A1	2/2006	Morales et al.
2005/0159811	A1	7/2005	Lane	2006/0025854	A1	2/2006	Lashinski et al.
2005/0165477	A1	7/2005	Anduiza et al.	2006/0025855	A1	2/2006	Lashinski et al.
2005/0165478	A1	7/2005	Song	2006/0025856	A1	2/2006	Ryan et al.
2005/0171472	A1	8/2005	Lutter	2006/0025857	A1	2/2006	Bergheim et al.
2005/0171601	A1	8/2005	Cosgrove et al.	2006/0030747	A1	2/2006	Kantrowitz et al.
2005/0177227	A1	8/2005	Heim et al.	2006/0030866	A1	2/2006	Schreck
2005/0177228	A1	8/2005	Solem et al.	2006/0030882	A1	2/2006	Adams et al.
2005/0182483	A1	8/2005	Osborne et al.	2006/0030885	A1	2/2006	Hyde
2005/0184122	A1	8/2005	Hlavka et al.	2006/0036317	A1	2/2006	Vidlund et al.
2005/0187614	A1	8/2005	Agnew	2006/0041305	A1	2/2006	Lauterjung
2005/0187616	A1	8/2005	Realyvasquez	2006/0041306	A1	2/2006	Vidlund et al.
2005/0187617	A1	8/2005	Navia	2006/0047297	A1	3/2006	Case
2005/0192606	A1	9/2005	Paul, Jr. et al.	2006/0047338	A1	3/2006	Jenson
2005/0192665	A1	9/2005	Spenser et al.	2006/0047343	A1	3/2006	Oviatt et al.
2005/0197692	A1	9/2005	Pai et al.	2006/0052804	A1	3/2006	Mialhe
2005/0197693	A1	9/2005	Pai et al.	2006/0052867	A1	3/2006	Revuelta et al.
2005/0197694	A1	9/2005	Pai et al.	2006/0058817	A1	3/2006	Starksen et al.
2005/0203549	A1	9/2005	Realyvasquez	2006/0058865	A1	3/2006	Case et al.
2005/0203605	A1	9/2005	Dolan	2006/0058871	A1	3/2006	Zakey et al.
2005/0203614	A1	9/2005	Forster et al.	2006/0058889	A1	3/2006	Case et al.
2005/0203615	A1	9/2005	Forster et al.	2006/0064115	A1	3/2006	Allen et al.
2005/0203616	A1	9/2005	Cribier	2006/0064116	A1	3/2006	Allen et al.
2005/0203617	A1	9/2005	Forster et al.	2006/0064118	A1	3/2006	Kimblad
2005/0203618	A1	9/2005	Sharkawy et al.	2006/0064174	A1	3/2006	Zadno
2005/0216039	A1	9/2005	Lederman	2006/0069400	A1	3/2006	Burnett et al.
2005/0216077	A1	9/2005	Mathis et al.	2006/0069430	A9	3/2006	Rahdert et al.
2005/0216078	A1	9/2005	Starksen et al.	2006/0074483	A1	4/2006	Schroyer
2005/0222675	A1	10/2005	Sauter	2006/0074484	A1	4/2006	Huber
2005/0222678	A1	10/2005	Lashinski et al.	2006/0074485	A1	4/2006	Realyvasquez
2005/0228422	A1	10/2005	Machold et al.	2006/0085060	A1	4/2006	Campbell
2005/0228479	A1	10/2005	Pavenik et al.	2006/0089708	A1	4/2006	Osse et al.
2005/0228486	A1	10/2005	Case et al.	2006/0095115	A1	5/2006	Bladillah et al.
2005/0228494	A1	10/2005	Marquez	2006/0095125	A1	5/2006	Chinn et al.
2005/0228495	A1	10/2005	Macoviak	2006/0099326	A1	5/2006	Keogh et al.
2005/0228496	A1	10/2005	Mensah et al.	2006/0100697	A1	5/2006	Casanova
2005/0234541	A1	10/2005	Hunt et al.	2006/0100699	A1	5/2006	Vidlund et al.
2005/0234546	A1	10/2005	Nugent et al.	2006/0106278	A1	5/2006	Machold et al.
2005/0240200	A1	10/2005	Bergheim	2006/0106279	A1	5/2006	Machold et al.
2005/0240202	A1	10/2005	Shennib et al.	2006/0106456	A9	5/2006	Machold et al.
2005/0240255	A1	10/2005	Schaeffer	2006/0111660	A1	5/2006	Wolf et al.
2005/0240259	A1	10/2005	Sisken et al.	2006/0111773	A1	5/2006	Rittgers et al.
2005/0240262	A1	10/2005	White	2006/0111774	A1	5/2006	Samkov et al.
2005/0244460	A1	11/2005	Alferiev et al.	2006/0116572	A1	6/2006	Case
2005/0246013	A1	11/2005	Gabbay	2006/0116756	A1	6/2006	Solem et al.
2005/0251251	A1	11/2005	Cribler	2006/0122686	A1	6/2006	Gilad et al.
2005/0256566	A1	11/2005	Gabbay	2006/0122692	A1	6/2006	Gilad et al.
2005/0261704	A1	11/2005	Mathis	2006/0122693	A1	6/2006	Biadillah et al.
2005/0261759	A1	11/2005	Lambrecht et al.	2006/0127443	A1	6/2006	Helmus
2005/0267493	A1	12/2005	Schreck et al.	2006/0129235	A1	6/2006	Sequin et al.
2005/0267560	A1	12/2005	Bates	2006/0129236	A1	6/2006	McCarthy



2006/0135476	A1	6/2006	Kutryk et al.	WO	2004091449	10/2004
2006/0135964	A1	6/2006	Vesley	WO	2004091454	10/2004
2006/0135967	A1	6/2006	Realyvasquez	WO	2004093638	11/2004
2006/0136044	A1	6/2006	Osborne et al.	WO	2004093726	11/2004
2006/0136045	A1	6/2006	Flagle et al.	WO	2004093728	11/2004
2006/0136052	A1	6/2006	Vesley	WO	2004093730	11/2004
2006/0136054	A1	6/2006	Berg et al.	WO	2004093745	11/2004
2006/0142846	A1	6/2006	Pavcnik et al.	WO	2004093935	11/2004
2006/0142847	A1	6/2006	Shaknovich	WO	2004096100	11/2004
2006/0142848	A1	6/2006	Gabbay	WO	2004103222	12/2004
2006/0142854	A1	6/2006	Alferness et al.	WO	2004103223	12/2004
2006/0149358	A1	7/2006	Zilla et al.	WO	2004105584	12/2004
2006/0149360	A1	7/2006	Schwammenthal et al.	WO	2004105651	12/2004
2006/0149367	A1	7/2006	Sieracki	WO	2004112582	12/2004
2006/0149368	A1	7/2006	Spence	WO	2004112585	12/2004
2006/0161133	A1	7/2006	Laird et al.	WO	2004112643	12/2004
2006/0161248	A1	7/2006	Case et al.	WO	2004112652	12/2004
2006/0161250	A1	7/2006	Shaw	WO	2004112657	12/2004
2006/0167468	A1	7/2006	Gabbay	WO	2004112658	12/2004
2006/0167541	A1	7/2006	Lattouf	WO	2005000152	1/2005
2006/0167542	A1	7/2006	Quintessenza	WO	2005002424	1/2005
2006/0167543	A1	7/2006	Bailey et al.	WO	2005002466	1/2005
2006/0195180	A1	8/2006	Kheradvar et al.	WO	2005004753	1/2005

## FOREIGN PATENT DOCUMENTS

EP	0 466 518	1/1992		WO	2005007017	1/2005
FR	2 728 457	6/1996		WO	2005007018	1/2005
WO	8800459	1/1988		WO	2005007036	1/2005
WO	9015582	12/1990		WO	2005007037	1/2005
WO	9501669	1/1995		WO	2005009285	2/2005
WO	9619159	6/1996		WO	2005009286	2/2005
WO	9803656	1/1998		WO	2005009505	2/2005
WO	9846115	10/1998		WO	2005009506	2/2005
WO	9904724	2/1999		WO	2005011473	2/2005
WO	WO 00/47139	8/2000		WO	2005011534	2/2005
WO	0067679	11/2000		WO	2005011535	2/2005
WO	0115650	3/2001		WO	2005013860	2/2005
WO	0117462	3/2001		WO	2005018507	3/2005
WO	WO 01/54624	8/2001	AI	WO	2005021063	3/2005
WO	03047468	6/2003		WO	2005023155	3/2005
WO	03084443	10/2003		WO	2005025644	3/2005
WO	2004019825	3/2004		WO	2005027790	3/2005
WO	2004021893	3/2004		WO	2005027797	3/2005
WO	2004023980	3/2004		WO	2005034812	4/2005
WO	2004030568	4/2004		WO	2005039428	5/2005
WO	2004030569	4/2004		WO	2005039452	5/2005
WO	2004030570	4/2004		WO	2005046488	5/2005
WO	2004032724	4/2004		WO	2005046528	5/2005
WO	2004032796	4/2004		WO	2005046529	5/2005
WO	2004037128	5/2004		WO	2005046530	5/2005
WO	2004037317	5/2004		WO	2005046531	5/2005
WO	2004039432	5/2004		WO	2005048883	6/2005
WO	2004043265	5/2004		WO	2005049103	6/2005
WO	2004043273	5/2004		WO	2005051226	6/2005
WO	2004043293	5/2004		WO	2005055811	6/2005
WO	2004045370	6/2004		WO	2005055883	6/2005
WO	2004045378	6/2004		WO	2005058206	6/2005
WO	2004045463	6/2004		WO	2005065585	7/2005
WO	2004047677	6/2004		WO	2005065593	7/2005
WO	2004060217	7/2004		WO	2005065594	7/2005
WO	2004060470	7/2004		WO	2005070342	8/2005
WO	2004062725	7/2004		WO	2005070343	8/2005
WO	2004060826	8/2004		WO	2005072654	8/2005
WO	2004066803	8/2004		WO	2005072655	8/2005
WO	2004069287	8/2004		WO	2005079706	9/2005
WO	2004075789	9/2004		WO	2005082288	9/2005
WO	2004080352	9/2004		WO	2005082289	9/2005
WO	2004082523	9/2004		WO	2005084595	9/2005
WO	2004082527	9/2004		WO	2005087139	9/2005
WO	2004082528	9/2004		WO	2005087140	9/2005
WO	2004082536	9/2004		WO	2006000090	1/2006
WO	2004082537	9/2004		WO	2006000763	1/2006
WO	2004082538	9/2004		WO	2006000776	1/2006
WO	2004082757	9/2004		WO	2006002492	1/2006
WO	2004084746	10/2004		WO	2006004679	1/2006
WO	2004084770	10/2004		WO	2006005015	1/2006
WO	2004089246	10/2004		WO	2006011127	2/2006
WO	2004089250	10/2004		WO	2006012011	2/2006
WO	2004089253	10/2004		WO	2006012013	2/2006
WO				WO	2006012038	2/2006
WO				WO	2006012068	2/2006

WO 2006012322 2/2006  
WO 2006019498 2/2006  
WO 2006026371 3/2006  
WO 2006026377 3/2006  
WO 2006026912 3/2006  
WO 2006027499 3/2006  
WO 2006028821 3/2006  
WO 2006029062 3/2006  
WO 2006031436 3/2006  
WO 2006031469 3/2006  
WO 2006032051 3/2006  
WO 2006034245 3/2006  
WO 2006035415 4/2006  
WO 2006041505 4/2006  
WO 2006044679 4/2006  
WO 2006048664 5/2006  
WO 2006050459 5/2006  
WO 2006050460 5/2006  
WO 2006054107 5/2006  
WO 2006054930 5/2006

WO 2006055982 5/2006  
WO 2006060546 6/2006  
WO 2006063108 6/2006  
WO 2006063181 6/2006  
WO 2006063199 6/2006  
WO 2006064490 6/2006  
WO 2006065212 6/2006  
WO 2006065930 6/2006  
WO 2006066148 6/2006  
WO 2006066150 6/2006  
WO 2006069094 6/2006  
WO 2006070372 7/2006  
WO 2006073628 7/2006  
WO 2006076890 7/2006

OTHER PUBLICATIONS

PCT International Preliminary Report on Patentability.

\* cited by examiner

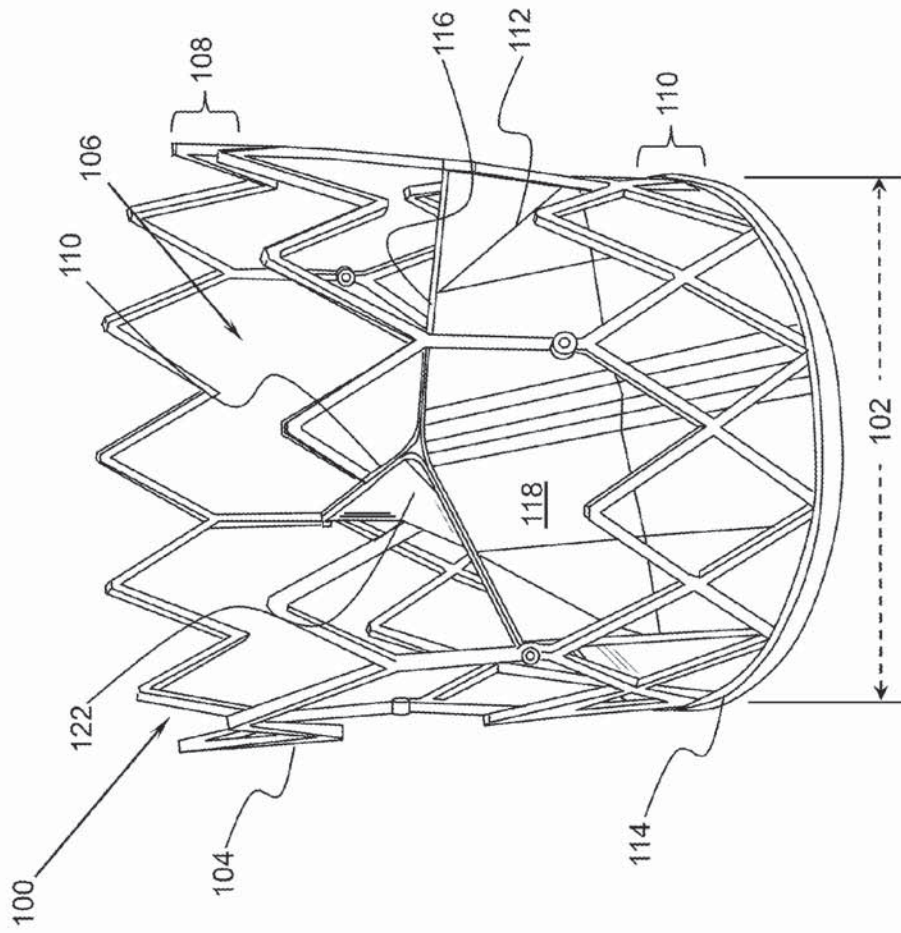


FIG. 1



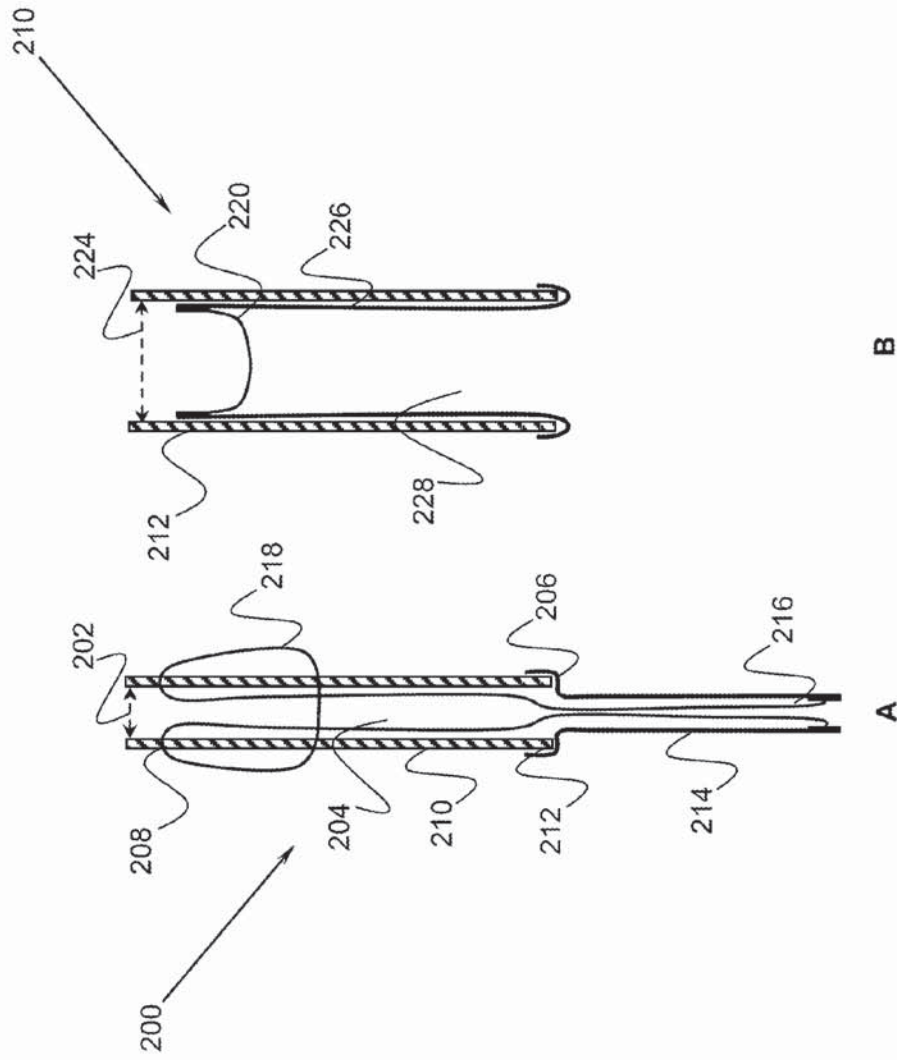


FIG. 2A

FIG. 2B

A

B

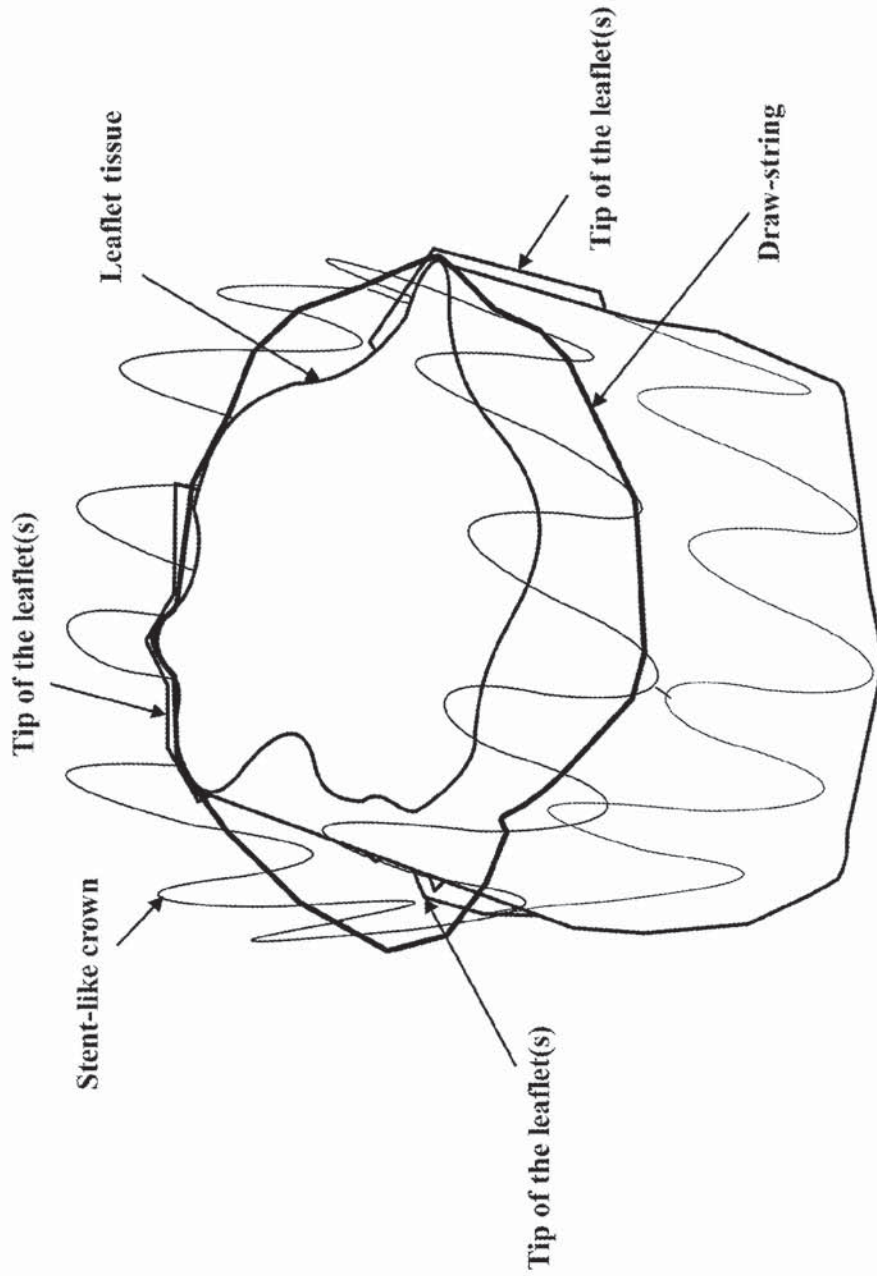


FIG. 2C



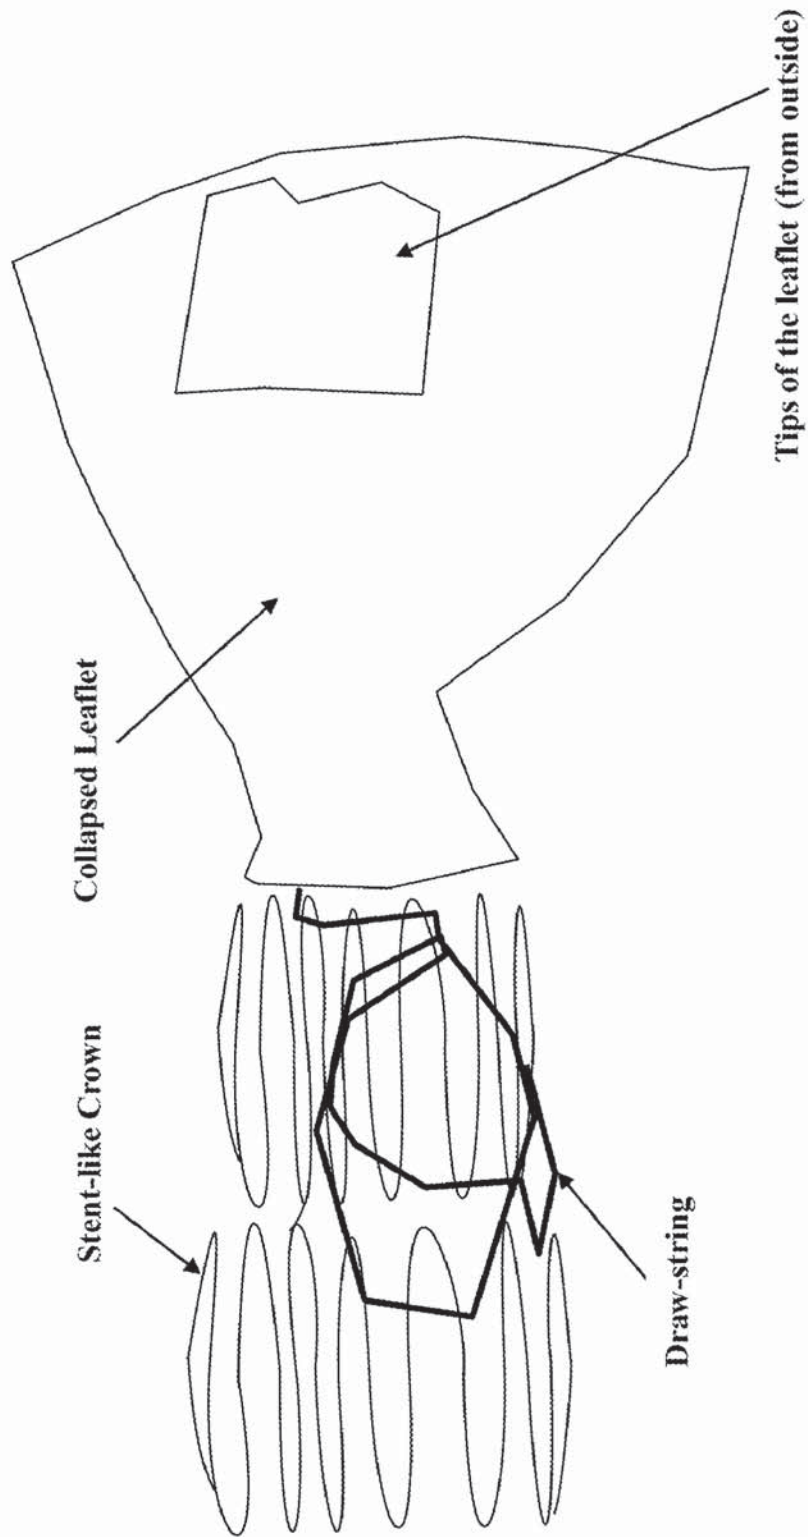


FIG. 2D

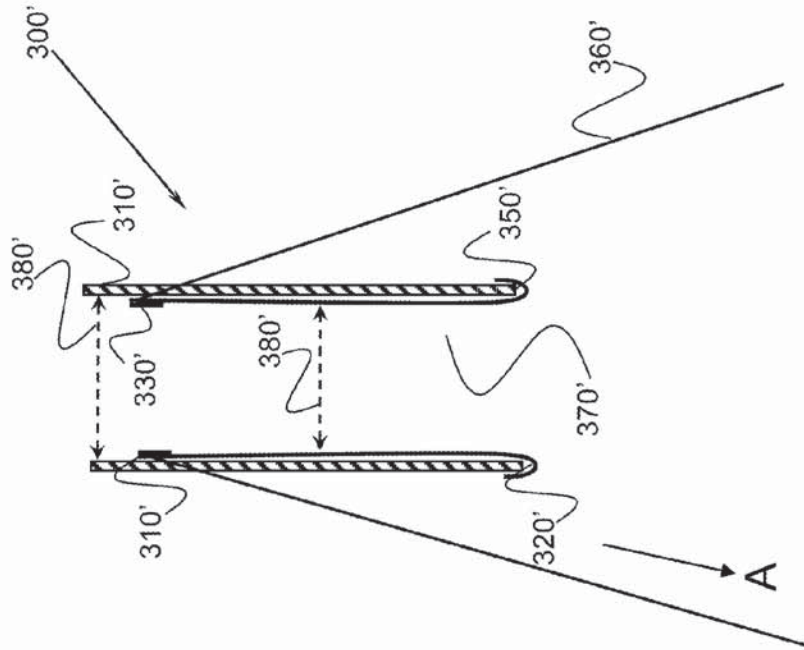


FIG. 3B

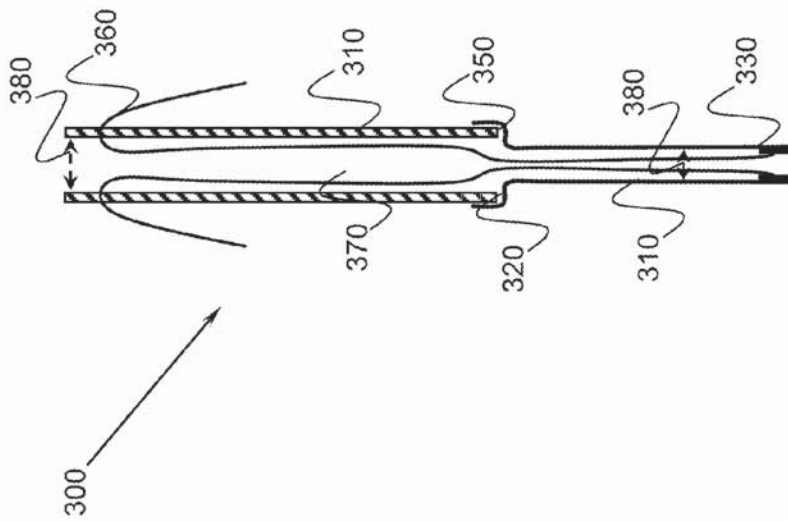


FIG. 3A



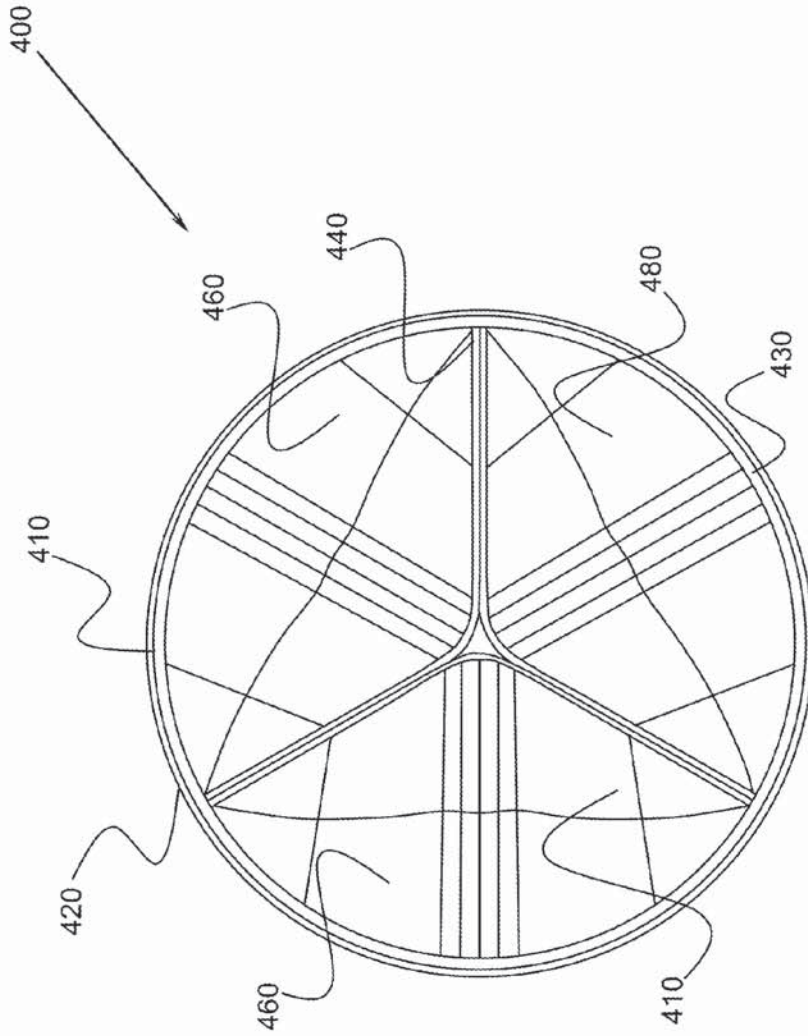


FIG. 4

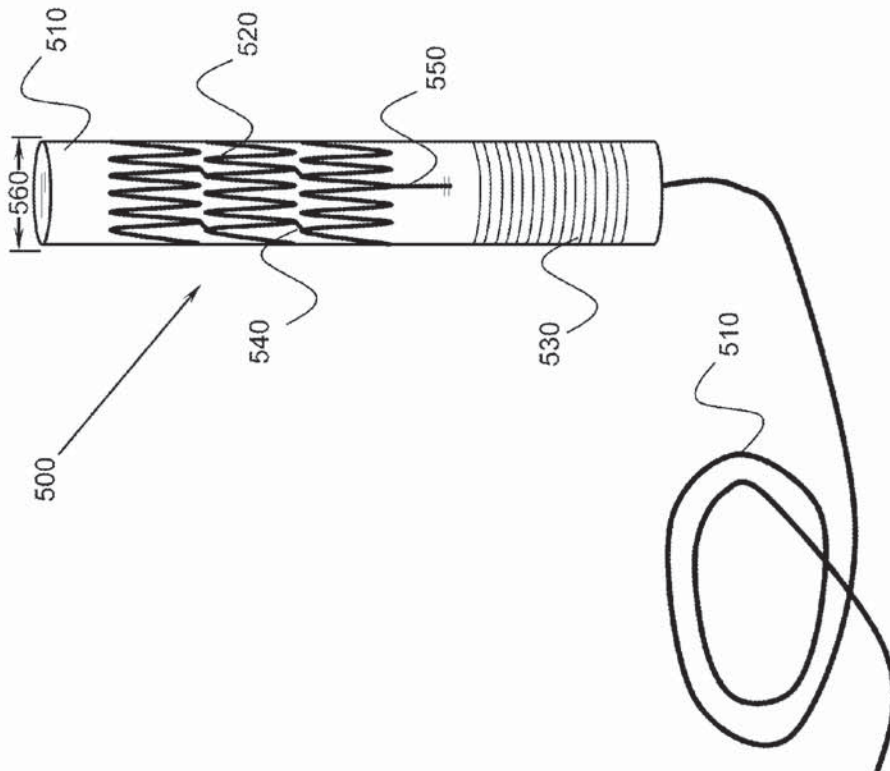


FIG. 5



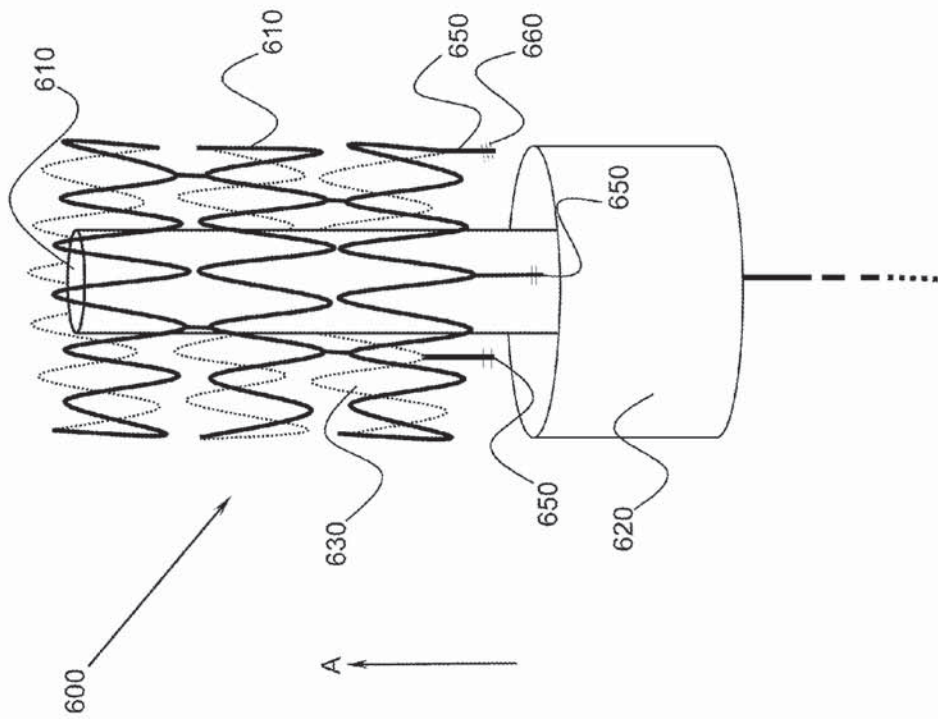


FIG. 6

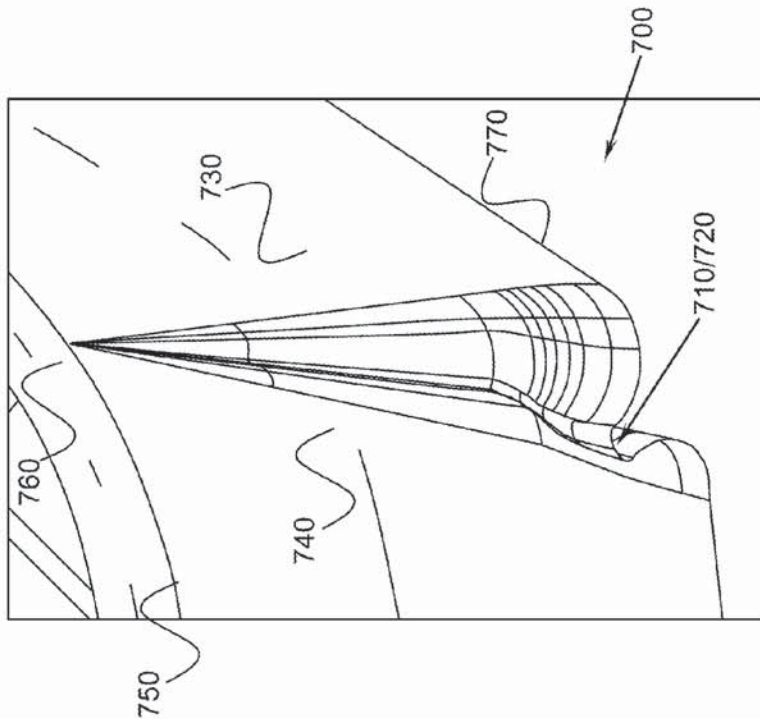


FIG. 7

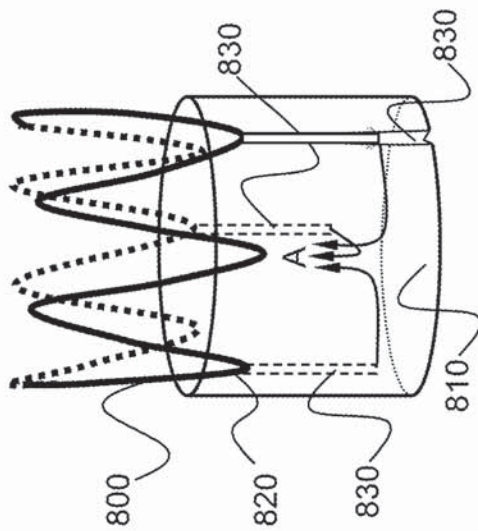


FIG. 8A

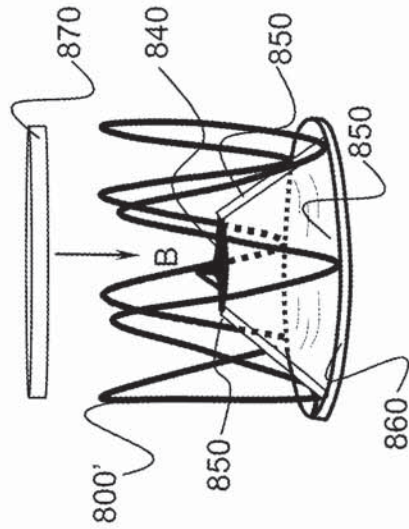


FIG. 8B

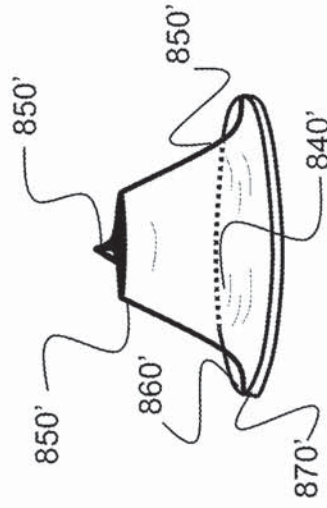


FIG. 8C



## IN-SITU FORMATION OF A VALVE

## PRIORITY CLAIM

The present application is a non-provisional patent application, claiming the benefit of priority of U.S. Provisional Patent Application No. 60/879,288, filed Jan. 8, 2007, titled, "In-situ formation of a valve by infolding leaflets and its method of delivery;" and U.S. Provisional Patent Application No. 60/930,458, filed May 16, 2007, titled, "Deployable forming heart valve system and its percutaneous method of delivery."

## BACKGROUND OF THE INVENTION

## (1) Technical Field

The present invention is related to a prosthetic valve and a method for implantation in a body channel, and methods of delivery.

## (2) Description of Related Art

Human heart valves under the conditions of normal physiological functions are organs that open under the changes in pressure gradient inside the cardiac chambers. Four valves in the heart serve to direct the flow of blood through all chambers in a forward direction. In addition to the four heart valves (tricuspid valve, mitral valve, aortic valve, and pulmonary valve), a patient has other flow-regulatory valves, such as venous valves, sphincter valves, and the like.

When disease conditions affect the structure or the materials of the native valve, the valve itself will decay, degenerate or disrupt and requires repair or replacement to restore proper function necessary for the continuation of life.

U.S. Pat. No. 4,451,936 to Carpentier et al., entire contents of which are incorporated herein by reference, discloses an aortic prosthetic valve for supra-annular implantation comprising a valve body of generally annular configuration and a valve element movably mounted on the valve body for opening and closing the valve, and a scalloped suture ring circumscribing the valve body adjacent the base surface and configured to approximately fit the contour of the Sinuses of Valsalva at the base of the aorta.

U.S. Pat. No. 4,790,843 to Carpentier et al., entire contents of which are incorporated herein by reference, discloses a prosthetic heart valve assembly that includes an artificial annulus, a prosthetic valve and a retaining ring for releasably retaining the prosthetic valve on the artificial annulus. By removing the retaining ring, the valve can be replaced with another valve.

U.S. Pat. No. 4,994,077 to Gabbay, entire contents of which are incorporated herein by reference, discloses an improved prosthetic heart valve comprising a support body or stent covered by a layer of biological tissue having only the smooth surfaces thereof presented outwardly. The valve cusp is made of pericardial tissue that has been doubled over such that the rough side thereof is folded inwardly.

U.S. Pat. No. 4,994,077 to Dobben, entire contents of which are incorporated herein by reference, discloses a valve system consisting of a cylindrical or crown shaped stent that is made by bending wire into a zigzag shape to anchor the device and attach the flow regulator flap of a valve. The device presents significant hemodynamic, delivery, fatigue and stability disadvantages.

U.S. Pat. No. 5,163,953 to Vince, entire contents of which are incorporated herein by reference, discloses a valve system consisting of a flow-regulation mechanism of a flap of biologic material that is mounted inside a stent comprised of a toroidal body formed of a flexible coil of wire. The main

shortcoming of this design is the profile and configuration, thus making the device clinically ineffective as a minimally invasive technique.

U.S. Pat. No. 5,332,402 to Teitelbaum, entire contents of which are incorporated herein by reference, discloses a valve system consisting of shape memory Nitinol and a flow-regulating valve. The stent-like support is comprised of a mesh-work or braiding of Nitinol wire with trumpet-like distal and proximal flares. The flared ends are intended to maintain the position of the stent component across the valve thereby anchoring the device. The disadvantages of the device are the reduced valve orifice and sub-optimal hemodynamic characteristics.

U.S. Pat. No. 5,370,685 to Stevens, entire contents of which are incorporated herein by reference, discloses a percutaneous valve replacement system for the endovascular removal of a malfunctioning valve followed by replacement with a prosthetic valve. The valve replacement system may include a prosthetic valve device comprised of a stent and cusps for flow-regulation such as a fixed porcine aortic valve, a valve introducer, an intraluminal procedure device, a procedure device capsule and a tissue cutter. The valve device disclosed requires a large delivery catheter and intraluminal-securing means such as suturing to anchor the device at the desired location.

U.S. Pat. No. 5,397,351 to Pavcnik et al., entire contents of which are incorporated herein by reference, discloses a self-expanding percutaneous valve comprised of a poppet, a stent and a restraining element. The valve stent has barbed means to anchor to the internal passageway. The device includes a self-expanding stent of a zigzag configuration in conjunction with a cage mechanism comprised of a multiplicity of criss-crossed wires and a valve seat. The disadvantages of the device include large delivery profile, reduced effective valvular orifice, and possible perivalvular leakage.

U.S. Pat. No. 5,411,552 to Andersen et al., entire contents of which are incorporated herein by reference, discloses various balloon expandable percutaneous prosthetic valves. One embodiment discloses a valve prosthesis comprised of a stent made from an expandable cylindrical structure and an elastically collapsible valve mounted to the stent. The device is placed at the desired location by balloon expanding the stent and the valve. The main disadvantage to this design is the 20+ French size delivery catheters.

U.S. Pat. No. 5,445,626 to Gigante, entire contents of which are incorporated herein by reference, discloses a valve operated catheter for urinary incontinence and retention comprising a flexible duct designed to be inserted in the patient's urethra, the catheter provided with a spiral shaped end portion, having a plurality of holes for the passage of urine. The duct is provided, at its other end, with a seat in which there is housed a valve made of elastic material, the valve being usually closed because of the elastic action.

U.S. Pat. No. 5,500,014 to Quijano et al., entire contents of which are incorporated herein by reference, discloses a biological valvular prosthesis comprising a chemically fixed conduit derived from a harvested vein segment bearing at least one integrally formed venous valve, and a restriction means positioned about the conduit at either side of the venous for restricting the venous valve from expanding outwardly.

U.S. Pat. No. 5,824,064 to Taheri, entire contents of which are incorporated herein by reference, discloses an aortic valve replacement system combined with an aortic arch graft. The devices and percutaneous methods described require puncture of the chest cavity.



U.S. Pat. No. 5,840,081 to Andersen et al., entire contents of which are incorporated herein by reference, discloses a valve prosthesis for implantation in the body by use of a catheter. The valve prosthesis is formed of a stent with a pre-formed collapsible valve mounted on the stent.

U.S. Pat. No. 5,855,597 to Jayaraman, entire contents of which are incorporated herein by reference, discloses a device comprising a star-shaped stent, a replacement valve and a replacement graft for use in repairing a damaged cardiac valve. The device is comprised of a chain of interconnected star-shaped stent segments in the center of which sits a replacement valve. The flow-regulation mechanism consists of three flaps cut into a flat piece of graft material that is rolled to form a conduit in which the three flaps may be folded inwardly in an overlapping manner.

U.S. Pat. No. 5,855,601 to Bessler et al., entire contents of which are incorporated herein by reference, discloses methods and devices for the endovascular removal of a defective heart valve and the replacement with a percutaneous cardiac valve. The device is comprised of a self-expanding stent member with a flexible valve disposed within. The stent member is of a self-expanding cylindrical shape made from a closed wire in a zigzag configuration that can be a single piece, stamped, extruded or formed by welding the free ends together. The flow-regulation mechanism is comprised of an arcuate portion that contains a slit to form leaflets and a cuff portion that is sutured to the stent and encloses the stent. The preferred flow regulator is a porcine pericardium with three cusps.

U.S. Pat. No. 5,925,063 to Khosravi, entire contents of which are incorporated herein by reference, discloses a percutaneous prosthetic valve comprised of a coiled sheet stent to which a plurality of flaps are mounted on the interior surface to form a flow-regulation mechanism that may be comprised of a biocompatible material. The disadvantages of this design include problematic interactions between the stent and flaps in the delivery state, and the lack of a detailed mechanism to ensure that the flaps will create a competent one-directional valve.

U.S. Pat. No. 5,954,766 to Zadano-Azizi et al., entire contents of which are incorporated herein by reference, discloses a device in which flow-regulation is provided by a flap disposed within a frame structure capable of taking an insertion state and an expanded state. The preferred embodiment of the flow-regulation mechanism is defined by a longitudinal valve body made of a sufficiently resilient material with a slit that extends longitudinally through the valve body.

U.S. Pat. No. 5,957,949 to Leonhardt et al., entire contents of which are incorporated herein by reference, discloses a prosthetic valve comprised of a tubular graft having radially compressible annular spring portions and a flow regulator, which is preferably a biological valve disposed within. In addition to oversizing the spring stent by 30%, anchoring means is provided by a light-activated biocompatible tissue adhesive that is located on the outside of the tubular graft and seals to the living tissue. Disadvantages of this device include those profile concerns, a large diameter complex delivery system, and feasibility of the light actuated anchoring means.

U.S. Pat. No. 6,106,550 to Magovern et al., entire contents of which are incorporated herein by reference, discloses an implantable apparatus for receiving a heart valve, comprising an annular ring having an inner wall and an outer wall, a plurality of channels displaced circumferentially about the ring, each channel extending from the inner wall to the outer wall, and a plurality of tissue attachment pins each pin being movable in a respective one of the channels between a first

position during implantation, and a second position wherein the first end of each pin extends beyond the outer wall for tissue attachment.

U.S. Pat. No. 6,168,614 to Andersen et al., entire contents of which are incorporated herein by reference, discloses a method of endovascularly delivering a valve through a blood vessel, comprising the steps of providing a tissue valve and an expandable support structure, connecting the tissue valve to the support structure, and securing the tissue valve and the support structure to a desired valve location with the support structure in the expanded shape.

U.S. Pat. No. 6,206,911 to Milo, entire contents of which are incorporated herein by reference, discloses an expandable stent that is created so as to undergo essentially no axial foreshortening when expanded from an unexpanded or compressed configuration to an operative configuration. Attachment to the surrounding tissue may be via pairs of needle-like projections or prongs that may be bent to have a radial orientation during the deployment phase.

U.S. Pat. No. 6,283,127 to Sterman et al., entire contents of which are incorporated herein by reference, discloses a device system and methods facilitating intervention within the heart or a great vessel without the need for a median sternotomy or other form of gross thoracotomy, substantially reducing trauma, risk of complication, recovery time, and pain for the patient. Using the device systems and methods of the invention, surgical procedures may be performed through percutaneous penetrations within intercostal spaces of the patient's rib cage, without cutting, removing, or significantly displacing any of the patient's ribs or sternum.

U.S. Pat. No. 6,530,952 to Vesely, entire contents of which are incorporated herein by reference, discloses a cardiovascular valve system including a permanent base unit that is affixed to the patient using conventional sutures or staples, and a collapsible valve having a collapsible frame that mates with the permanent base unit, and supports valve leaflets. An installed collapsible frame may be re-collapsed and disengaged from the permanent housing whereas a new collapsible valve is then installed, to resume the function of the prosthesis.

U.S. Pat. No. 6,569,196 to Vesely, entire contents of which are incorporated herein by reference, discloses a system for minimally invasive insertion of a bioprosthetic heart valve. The system includes a collapsible tissue-based valve system, a catheter-based valve delivery system, a surgical platform and a device tracking and visualization system, wherein the collapsible valve system includes a permanent outer frame that is affixed to the patient using conventional sutures or staples and a collapsible valve having a collapsible inner frame that mates with the outer frame.

U.S. Pat. No. 6,582,462 to Andersen et al., entire contents of which are incorporated herein by reference, discloses a valve prosthesis for implantation in a body channel by way of catheterization, the prosthesis comprising a radially collapsible and expandable cylindrical stent and a collapsible and expandable valve having commissural points wherein the valve is mounted to the stent at the commissural points.

U.S. Pat. No. 6,652,578 to Bailey et al., entire contents of which are incorporated herein by reference, discloses a catheter system with minimally invasive techniques for percutaneous and transluminal valvuloplasty and prosthetic valve implantation.

U.S. Pat. No. 6,830,584 to Seguin, entire contents of which are incorporated herein by reference, discloses a device for replacing, via a percutaneous route, a heart valve located in a bodily vessel, comprising an elongated support element, two series of elongated blades arranged around the circumference



of the elongated elements, where the blades have opposite cutting edges and can be extended corolla-shaped such that their cutting edges are set in the extension of one another thereby forming circular cutting edges to cut the native valve so as to separate it from the corporeal duct.

U.S. Pat. No. 6,830,585 to Artof et al., entire contents of which are incorporated herein by reference, discloses a percutaneously deliverable heart valve with a plurality of valvular leaflets, the plurality of leaflets being sewn together at least a portion of their side edges to form an annulus at about the in-flow edge and a plurality of commissure tissues.

U.S. Pat. No. 6,896,690 to Lambrecht et al., entire contents of which are incorporated herein by reference, discloses a device for performing intravascular procedures wherein at least a portion of the device is configured for placement in a flowpath of a blood vessel. The device comprises a valve means configured to allow greater antegrade flow than retrograde flow through the vessel and a filter operative to restrict the passage of emboli while allowing blood flow through the vessel.

U.S. Pat. No. 6,908,481 to Cribier, entire contents of which are incorporated herein by reference, discloses a valve prosthesis comprising a collapsible, elastic valve member, an elastic stent member in which the valve member is mounted, and a support coupled to the valve member and positioned between the valve member and the stent member, wherein the stent member forms a continuous surface and comprises strut members that provide a structure sufficiently rigid to prevent eversion.

U.S. Pat. No. 6,951,571 to Srivastava, entire contents of which are incorporated herein by reference, discloses a valve-implanting device comprising a collapsible frame, inner and outer guide wires removably connected to the collapsible frame, and a plurality of valve flaps attached to the collapsible frame.

U.S. Pat. No. 6,974,476 to McGuckin, Jr. et al., entire contents of which are incorporated herein by reference, discloses a valve system comprising a first substantially annular portion adapted to be positioned on a proximal side of the annulus of a patient and a second substantially annular portion adapted to be positioned on a distal side of the annulus of a patient, wherein at least one of the first and second substantially annular portions is movable towards the other portion to a clamped position to clamp around the annulus. The second portion has a flow restricting apparatus.

Each of the prior art stent valve designs has certain disadvantages which are resolved by the present embodiments. The prior art valve prosthesis generally consists of a support structure with a tissue valve connected to it, wherein the support structure is delivered in a collapsed shape intraluminally and secured to a desired valve location with the support structure in the expanded shape. However, the support structure tends to compressively impinge a portion of the leaflets of the tissue valve at the structure struts when the support structure is expanded by an inflatable balloon for positioning endovascularly. The impinged leaflets tend to deteriorate and calcify, making the valve useless. Moreover, recent studies showed that there is an imperfect apposition of the stent against the native valve which resulted in paravalvular leak and obstruction of coronary Ostia at the coronary sinuses. Additionally, existing stent designs set a limit for a minimum catheter size and cannot be delivered with small enough catheters. As a result, one direct disadvantage of the size limitation is the exclusion of children from the beneficiaries of this technology. Thus, a continuing need exists for a new and improved expanding valve structure that is formed in-situ and that can be used with tiny catheters.

## SUMMARY OF THE INVENTION

It is an objective of the present invention to provide a valve prosthesis which is formed in situ. It is also an objective of the present invention to permit implantation of the prosthetic valve without surgical intervention in the body.

In one aspect the present invention is an in-situ forming valve, comprising: an expandable component comprising a hollow portion, a distal end, and a proximal end; a sheet component comprising a distal circumference and a proximal circumference, the distal circumference held in at least partial contact with the distal end of the expandable component, the proximal end of the sheet component further comprising at least two pinched regions; and an at least one link detachably attached to at least one point of the proximal end of the sheet, the link configured to position the proximal end of the sheet component into the hollow portion of the expandable component thereby forming a functional valve in situ.

In another aspect of the present invention, the sheet component comprises a single tubular sheet.

In another aspect of the present invention, the sheet component is a multitude of sheet components sealed together.

In another aspect of the present invention, the at least one link is further attached to at least one point above the distal end of the expandable component such that the expansion of the expandable component is configured to position the proximal end of the sheet component into the hollow portion of the expandable component thereby forming a functional valve in situ.

In another aspect of the present invention, the expandable component is at least partially comprised of a shape memory material.

In another aspect of the present invention, the expandable component is at least partially comprised of an elastic material.

In another aspect of the present invention, the expandable component is equipped with at least one bioactive agent selected from a group consisting of analgesics/antipyretics, antiasthmatics, antibiotics, antidepressants, antidiabetics, antifungal agents, antihypertensive agents, anti-inflammatories, antineoplastics, antianxiety agents, immunosuppressive agents, antimigraine agents, sedatives/hypnotics, antipsychotic agents, antimanic agents, antiarrhythmics, antiarthritic agents, antigout agents, anticoagulants, thrombolytic agents, antifibrinolytic agents, platelet aggregation inhibitor agents, antibacterial agents, antiviral agents, antimicrobials, and anti-infectives.

In yet another aspect of the present invention, the sheet component is made from a material selected from a group consisting of natural membranes, synthetic material, engineered biological tissue, biological valvular leaflet tissue, pericardial tissue, and cross-linked pericardial tissue.

In another aspect of the present invention, the invention further comprises an elongate delivery apparatus, wherein the in-situ formed valve is collapsibly mounted onto the elongate delivery apparatus.

In another aspect of the present invention, the distal end of the at least one hollow sheet component at least partially extends out from the hollow portion and over the distal end of the expandable component.

In another aspect of the present invention, the at least one link is detachably attached to at least three points of contact along the proximal end of the sheet, the link configured to position the proximal end of the sheet component into the hollow portion of the expandable component, thereby forming a three flap valve in situ.



In another aspect of the present invention, the at least one link is made of a dissolvable material.

In a still further aspect of the present invention, the invention is an in-situ forming valve, comprising: an expandable component comprising a hollow portion, a distal end, and a proximal end; and a sheet component at least partially enveloping the distal end of the expandable component, the sheet component having a first pre-implantation configuration and a second functional valvular configuration, the first pre-implantation configuration is configured to transform to the second functional valvular configuration.

In another aspect of the present invention, the second functional valvular configuration is reversibly transformable back to the first pre-implantation configuration.

In a still further aspect of the present invention, the invention is a method comprising acts of: delivering an expandable component distally attached to a distal end of a sheet component to a target area; expanding the expandable component; and positioning the sheet component into the expandable component, such that the positioning induces the sheet component to form a functional valve within the expandable component.

In a still further aspect of the present invention, the act of expanding the expandable component automatically induces the sheet component to position within the expandable component thereby forming a functional valve.

In another aspect of the present invention, the act of positioning the sheet component into the expandable component is manually induced.

In another aspect of the present invention, the method further comprises an act of selectively suturing a proximal end of the sheet.

In another aspect of the present invention, the at least one link is attached to the at least one point of the proximal end of the sheet component by folding, sowing, pinching, suturing, gluing, chemical sealing, mechanically fastening, heat sealing, and any combination thereof.

In another aspect of the present invention, the method further comprises an act of replacing a preexisting natural valve or an artificial valve.

In a still further aspect of the present invention, the invention is a method for manufacturing a valve formed in situ comprising acts of: attaching at least a portion of an expandable component to a distal end of a sheet; fixedly attaching a plurality of portions of a proximal end to itself; and adjoining the distal portion of the sheet component to the distal end of the expandable component.

In another aspect of the present invention, the distal end of the sheet component is adjoined to a distal end of the expandable component by a fiber.

In a still further aspect of the present invention, the invention is an in-situ forming valve, comprising: an expandable component comprising a hollow portion, a distal end, and a proximal end; a plurality of prongs pivotally attached with the distal end of the expandable component; and a sheet component comprising a distal end and a proximal end, the proximal end of the sheet component adjustably attached with the each of the plurality of prongs, the prongs configured to position the proximal end of the sheet component within the hollow portion of the expandable component thereby forming a functional valve in situ.

In a still further aspect of the present invention, the invention is a method for forming a valve in situ comprising acts of: placing a compliant sheet component in contact with a plurality of prongs of an expandable component; using the prongs to pinch the proximal end at the point of contact between each of the prongs and the sheet; expanding the sheet

component and expandable component; and inverting the sheet component to form a valve in situ.

In a still further aspect the present invention, the invention is a method for forming a valve in situ comprising acts of: placing a sheet component in contact with a plurality of apexes of an expandable component; fastening the proximal end of the sheet component to itself in at least two locations; expanding the sheet component and expandable component; and turning the sheet component inside out thereby forming a valve in situ.

In another aspect of the present invention, the act of turning the sheet component inside out is automatically triggered by the expansion of the expanding the sheet.

In another aspect of the present invention is an in-situ forming valve, comprising: an expandable component comprising a hollow portion, a distal end, and a proximal end; and a sheet component at least partially attached with the distal end of the expandable component, the sheet component having a first pre-formed configuration and a second functional valvular configuration, the first pre-implantation configuration is configured to transform to the second functional valvular configuration and reversibly transform into the first pre-formed configuration.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The objects, features and advantages of the present invention will be apparent from the following detailed descriptions of the disclosed aspects of the invention in conjunction with reference to the following drawings, where:

FIG. 1 is a side perspective view of a formed tri-leaflet valve prosthesis;

FIG. 2A is a partial side view of a collapsed deployable forming valve system

FIG. 2B is a partial side view of an expanded, formed valve system;

FIG. 2C is the illustration of an example of an expanded component with the leaflet(s);

FIG. 2D is the illustration of an example of a collapsed expandable component with the attached compressed leaflet(s)

FIG. 3A is the partial side-view diagram of one example of a collapsed valve;

FIG. 3B is the partial side-view diagram of one example of an expanded, formed valve;

FIG. 4 is a top perspective view of an expanded tri-leaflet valve prosthesis;

FIG. 5 is a side-view of a collapsed a pre-formed valve prosthesis;

FIG. 6 is a side view of a stage of an expanding forming valve prosthesis;

FIG. 7 is a zoomed in view of a valve leaflet(s)' membrane;

FIG. 8A is an enhanced view of an expanded crown and an unformed sheet;

FIG. 8B is an illustration of one example of an expanded crown and a functional valve; and

FIG. 8C is an illustration of an example of an expanded tri-leaflet valve and its annular ring.

Appendix A is an additional description of the present invention, entitled, "Deployable forming heart valve system and its percutaneous method of delivery;" and

Appendix B is a further description of the present invention, entitled, "In-situ formation of a valve by infolding leaflets and its method of delivery."

#### DETAILED DESCRIPTION

The present invention satisfies the long felt need for a more compact and durable valve which may be formed in situ. The



present invention provides a self-deployable valve system, a method of delivery, and a method of manufacturing for the self-deployable valve system. The present invention delivers the necessary components for forming a complete valve system in situ.

In the following detailed description, numerous specific details are set forth in order to provide a more thorough understanding of the present invention. However, it will be apparent to one skilled in the art that the present invention may be practiced without necessarily being limited to these specific details. In other instances, well-known structures and devices are shown in block diagram form, rather than in detail, in order to avoid obscuring the present invention.

The reader's attention is directed to all papers and documents which are filed concurrently with this specification and which are open to public inspection with this specification, and the contents of all such papers and documents are incorporated herein by reference. All the features disclosed in this specification, (including any accompanying claims, abstract, and drawings) may be replaced by alternative features serving the same, equivalent or similar purpose, unless expressly stated otherwise. Thus, unless expressly stated otherwise, each feature disclosed is one example only of a generic series of equivalent or similar features.

Furthermore, any element in a claim that does not explicitly state "means for" performing a specified function, or "step for" performing a specific function, is not to be interpreted as a "means" or "step" clause as specified in 35 U.S.C. Section 112, Paragraph 6. In particular, the use of "step of" or "act of" in the claims herein is not intended to invoke the provisions of 35 U.S.C. 112, Paragraph 6.

Below, an introduction to the present invention is provided to give an understanding of the specific aspects. Then specific embodiments of the present invention are provided.

#### (1) Introduction

The present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. This invention may be embodied in many different forms and should not be construed as limited to the embodiments set forth herein. Further, the dimensions of layers and other elements shown in the accompanying drawings may be exaggerated to more clearly show the details. The present invention should not be construed as being limited to the dimensional relations shown in the drawings, nor should the individual elements shown in the drawings be construed to be limited to the dimensions shown.

##### (1.1) In Situ Formed Valve

Referring to FIG. 1, a side perspective view of a second configuration, or expanded state tri-leaflet valve **100** is shown. The valve **100** is a functional, one-way valve which may be fully deployed and assembled in situ. The expandable component **102** of the valve **100** is in a collapsed state as a part of the pre-valve prior to the delivery inside the body. During in situ deployment of the valve **100**, the expandable component **102** transforms to an expanded state.

Although shown as a collapsible stent-like frame, the expandable component **102** may take on a variety of forms and may be made from a variety of materials. Non-limiting examples of suitable expandable components **102** include but are not limited to shape-memory materials, stainless steel, polymers, plastic, etc. Further, the expandable component **102** may be made from any number of materials suitable for in vivo and industrial applications. Non-limiting examples of suitable materials include but are not limited to shape memory material, self-expanding Nitinol, or thermal shape memory Nitinol.

The expandable component **102** may also be equipped with at least one bioactive agent. For biologically inspired applications, the expandable component **102** may be equipped with a bioactive agent selected from a group consisting of analgesics/antipyretics, antiasthmatics, antibiotics, antipressants, antidiabetics, antifungal agents, antihypertensive agents, anti-inflammatories, antineoplastics, antianxiety agents, immunosuppressive agents, antimigraine agents, sedatives/hypnotics, antipsychotic agents, antimanic agents, antiarrhythmics, antiarthritic agents, antigout agents, anticoagulants, thrombolytic agents, antifibrinolytic agents, platelet aggregation inhibitor agents, and antibacterial agents, antiviral agents, antimicrobials, anti-infective agents, and any combination thereof.

The expandable component **102** includes a hollow portion **106**, a proximal end **108**, and distal end **110**. In the case of the assembled, formed valve **100** shown, the distal circumference **114** of the sheet component **112** may extend out from the hollow portion **106** and attached over the distal end **110** of the expandable component **102**. Distal circumference **114** overlap of the distal end **110** functionally prevents leakage of fluid such as but not limited to blood along the border of the valve **100**. Although the distal end **110** of the expandable component **102** may be a continuous annulus, a continuous shape is not necessary for either deployment or seepage prevention.

The sheet component **112** of the valve **100** is formed into a functional first leaflet **118**, second leaflet **110**, and third leaflet **122**. The first leaflet **118**, second leaflet **110**, and third leaflet **122** are formed by selectively shaping the proximal circumference **116** at a first shaping point **124**, second shaping point **126**, and third shaping point **128**. In one embodiment, the sheet component **112** may be a single continuous structure. As shown, the proximal circumference **116** is pinched or folded onto itself at the first shaping point **124** and second shaping point **126** to form the first leaflet **118** therebetween. The second leaflet **110** is formed by pinching or folding the proximal circumference **116** at the second shaping point **126** and the third shaping point **128**. Similarly, the third leaflet **122** is formed by pinching or folding the proximal circumference **116** at the first shaping point **124** and the third shaping point **128**. A shaping point may be temporarily or permanently held in position by either active or passive means. Non-limiting examples of methods by which the shape of the shaping point may be maintained include but are not limited to sutures, bends, fibers, ties, etc.

The sheet component **112** may be made from a variety of materials which may be varied to suit the needs of a particular application. Non-limiting examples of suitable materials include but are not limited to natural membranes, synthetic material, engineered biological tissue, biological valvular leaflet tissue, pericardial tissue, or crosslinked pericardial tissue. In one embodiment, the pericardial tissue may be procured from human, bovine, equine, porcine, ovine, or other animals. In another embodiment, the crosslinked pericardial tissue is crosslinked with a crosslinking agent selected from the group consisting of formaldehyde, glutaraldehyde, dialdehyde starch, antibiotics, glyceraldehydes, cyanamide, diimides, diisocyanates, dimethyl adipimidate, neomycin, carbodiimide, epoxy compound, and any mixture thereof. In an alternative embodiment, the sheet component **112** may be a complex of individual sheets affixed together to form a substantially continuous and leak proof structure. Multiple sheets may be sealed together in a variety of ways. Non-limiting examples of which include but are not limited to glue, epoxy, polymers, latex, etc.



## (1.2) Functionality of a Biologically Inspired Prosthetic Valve

The valve **100** may be used in a wide variety of applications. The valve **100** is well suited for a wide variety of industrial applications in which a competent one way valve is needed. The valve **100** is also well suited for biologically inspired valve prosthesis applications. For example, the valve **100** may be used to replace an existing natural valve in the body such as but not limited to heart valves, an existing prosthetic valve, or the valve may be placed in a location where a valve previously did not exist.

When used as a heart valve prosthesis, the valve **100** seamlessly works in place of a natural heart valve. Similar to a natural heart valve, the valve **100** is able to maintain the unidirectional flow of blood from one heart chamber to the next by selectively opening in response to a pressure gradient from one side of the valve to the other.

## (1.3) In Situ Formation of a Valve from a Deployable Forming Valve System

Referring to FIG. 2A, a collapsed partial side view of a deployable forming valve system **200** is shown. The deployable forming valve system **200** is in a collapsed pre-formed configuration. Importantly, the deployable forming valve system **200** lacks the functionality of a valve while in the pre-formed or radially collapsed state. Further, in the non-functional pre-formed state, the deployable forming valve system lacks the structural characteristics of a valve.

The deployable forming valve system **200** includes an expandable component **210**. The expandable component **210** of the deployable forming valve system **200** includes a hollow center or hollow portion **204**, a distal end **206**, and a proximal end **208**. A non-limiting example of a suitable expandable component **210** includes a tube that is shaped into a collapsible/expandable stent-like crown, although in general any piece with suitable attachment points, a hollow center, and the ability to radially expand would be considered a viable alternative. Further, although shown as an elongate and radially collapsed cylinder, the dimensions of the expandable component **210** may be varied to suit a variety of applications.

Attached with and overlapping the bottom circumference, or distal end **206**, of the expandable component **210** is the bottom edge or distal end **212** of an unformed leaflet or compliant sheet component **214**. The distal end **212** of the compliant sheet component **214** is shown as at least partially overlapping or enveloping the distal end **206** of the expandable component **210**.

In the first pre-formed configuration, the proximal end **216** of the compliant sheet component **214** extends downward and beneath the expandable component **210**. Although the expandable component **210** and compliant sheet component **214** of the deployable forming valve system **200** are attached, the valve aspect of deployable forming valve system **200** has not been formed and therefore does not function as an operable valve. When the deployable forming valve system **200** is deployed inside the heart, a blood vessel, a lymphatic vessel, or other body channel, the deployable forming valve system **200** is configured to transform to a second functional valvular configuration. Once deployed to the target site and manually or automatically activated, do the pre-valve components of the deployable forming valve system **200** become a fully functional valve. The deployable forming valve system **200** may optionally be removable from the implant site by transforming the device from the second functional valvular configuration back to the first pre-formed configuration of FIG. 2A.

In order to automatically transform the first pre-formed configuration to a second functional valvular configuration, a

variety of mechanisms may be used. A non-limiting example of a suitable mechanism includes using a link **218**. The link **218** may accomplish this task with a minimal number of attachment points. Non-limiting examples of suitable link **218** materials include but are not limited to natural or synthesized fiber, metal, or plastic, and elastic/non-elastic fibers such as but not limited to silk, Nitinol, and polymeric materials. When using a link **218**, the proximal end **208** of the expandable component **210** is attached to one end of a link **218**, such as a string, while the other end of the link **218** is attached to the proximal end **216** of the compliant sheet component **214**. By radially expanding the diameter **202** of the expandable component **210**, the link **218**, attached with the proximal end **216** of the compliant sheet component **214**, positions or draws the compliant sheet component **214** into the hollow portion **204** of the expandable component **210**. As the proximal end **216** of the compliant sheet component **214** is drawn or positioned into the hollow portion **204** proximally, the compliant sheet component **214** is pulled inside-out.

The collapsed state of the deployable forming valve system **200** is suitable for delivery to a desired target area. While in the first pre-formed configuration, the diameter **202** of the deployable forming valve system **200** is compressed to the lower limit of the deployable forming valve system **200**. Although the deployable forming valve system **200** is non-functional, the compressed diameter **202** facilitates the difficult task of traveling along narrow tubular, channels, veins, or arteries as the valve prosthesis is moved towards the target area.

Further information regarding a deployable forming heart valve system and its percutaneous method of delivery can be found in Appendix A, which is incorporated by reference as though fully set forth herein. Appendix A is the content of a provisional application to which this application claims priority.

Referring to FIG. 2B, a partial side view of an expanded valve prosthesis **220** is shown. While the expandable component **222** is expanding, the diameter **224** increases, turning the compliant sheet component **226** inside out and into the hollow portion **228** of the expandable component **222**. By synchronizing the expansion of the expandable crown with the positioning of the compliant sheet component **226** via a contraction system such as a link **220**, the formation of the second functional valvular configuration may be completely automated. While the expandable component **222** is expanded at the designated position, the draw-string at the proximal section of the crown pulls the compliant sheet component **226** inside out through the expandable component **222**. Examples of a suitable expansion mechanism include but are not limited to an expandable component **222** made from shape memory material or an inflatable balloon.

The automated or programmed formation of the functional valvular configuration from primary pre-valve configuration may be enhanced by an expandable component **222** which is forcibly compressed while in transit to the target deployment site. Once at the target site, the expandable component **222** is allowed to return to its natural expanded state, for example the formed, functional valvular configuration of FIG. 2B. Such activation transform may be accomplished by removing a physical restraint securing the first pre-implantation configuration **200**. Automatic activation of the expandable component may be accomplished by modifying the characteristics of the materials used in the expandable component **222**. Non-limiting examples of suitable expandable component **222** materials include but are not limited to stainless steel, shape-memory materials, superelastic materials and magnetic-shape-memory materials.



13

Referring to FIG. 3A, a partial side view of a collapsed manually deployable valve 300 is shown. The manually deployable valve 300 consists of two major components: a superior stent-like crown 310, and an inferior leaflet membrane 320. In the collapsed state, the crown 310 is constricted over a delivery catheter/guide-wire while the leaflet membrane 320 is wrinkled at the distal end 330 and proximal end 330. The manually deployable valve 300 is deliverable to its designated position transapically or via major vessels such as but not limited to femoral artery, carotid artery, and jugular vein.

The distal end 350 of the stent-like crown or expandable component 310 is connected to the distal end 330 of the leaflet membrane 320. The proximal end 330 of the unformed leaflet membrane 320 is proximally anchored to a contraction system such as a link 360 in the form of a draw-string or combination of pulling strings. Further, the link 360 may be a singular link 360 detachably attached to at least one point of contact along the proximal end 330 of the unformed leaflet membrane 320. Ultimately the formation of the leaflets, such as those shown in FIG. 1, may be manually performed or triggered independent of the expansion of the stent-like crown 310. For example, as the diameter 380 of the stent-like crown 310 is increasing, the diameter 390 of the leaflet membrane 320 also increases. Unlike the automatic formation of the second functional valvular configuration depicted in FIG. 3B, the proximal end 330 of the leaflet membrane 320 is manually positioned into the hollow portion 370 of the stent-like crown 310 by pulling the link 360. The link 360 is configured to position the proximal end 330 of the leaflet membrane 320 into the hollow portion 370 of the stent-like crown 310 thereby forming a tri-leaflet valve in situ.

Referring to FIG. 3B, a partial side view of the expanded, manually deployable valve 300' is shown. The stent-like crown 310' of the valve 300' may be expanded by any number of methods including but not limited to balloon catheters and other suitable expansion instruments. The stent-like crown 310' may also be made of a shape memory material or elastic material. Once the collapsed stent-like crown 300' has been delivered to the target site, the collapsed stent-like crown 300' is transformed to its expanded configuration 310. Attached to the distal end 350' of the stent like crown 310' is a portion of the leaflet membrane 320'. As the diameter 380' of the stent-like crown 310' increases, the diameter 390' of the leaflet membrane 320' also increases until the distal end 330' and proximal end 330' are fully opened (not shown in the picture). Once fully deployed, a contraction system, such as a link 360', is pulled downward in the direction of A. By pulling the link 360' in the direction of A, the open leaflet membrane 320' is positioned into the hollow portion 370', thereby forming a fully functional valve 300'.

A top perspective view of a tri-leaflet valve 400 is shown in FIG. 4. As shown, both the crown 410 and membrane(s) 420 have been expanded and formed into a fully functional tri-leaflet valve prosthesis 400. The distal end 430 of the membrane 420 is shown overlapping the distal end and side walls of the crown 410. The proximal end 440 of the crown 410 and the proximal end 440 of the membrane 420 are also clearly visible. The proximal end 440 of the membrane 420 defines the first leaflet 460, the second leaflet 470, and the third leaflet 480. The distal end 430 of the membrane 420 may be attached to the distal end of the crown 410 by mechanisms including, but not limited to, sewing, sutures or stitches, adhesives, or frictional fit depending on the particular application.

#### (1.4) Delivery of an In Situ Formed Valve Prosthesis

FIG. 5 demonstrates another embodiment of the present invention referred to as the pre-formed valve system 500,

14

deliverable and consequently deployable inside the target site within a body chamber, vessel, etc. Referring to FIG. 5, the subcomponents of a pre-valve system 500 over a partial segment of a delivery catheter are shown. The pre-valve system 500 is deliverable into a chamber in a collapsed state and transforms into a second functional valvular configuration. Although shown as a catheter 510 and guide-wire 520 assembly, a variety of instruments may be used to deliver and deploy the collapsed configuration of the valve inside the target site.

The pre-valve system 500 includes an expandable component, shown as a compressed crown 530, and a sheet component in the form of a compressed and compliant membrane 540. The compliant membrane 540 may be made of thin sheet component which is appended over the catheter 510. The compressed crown 530 is comprised of multiple segments held together with joints 550. A contraction system, such as a plurality of prongs 550 may be attached at the proximal end of the compressed crown 530. The prongs 550 act as a link which may be attached to at least one point of the proximal end of the compliant membrane 540. The prongs 550 may be attached to at least one point of the compliant membrane 540 by folding, sewing, pinching, suturing, gluing, chemical sealing, mechanically fastening, heat sealing, or any combination thereof.

The compliant membrane 540 may be made from compliant tissue membranes, which can be a single sheet component or a compound manifold. The compliant membrane 540 may also be made from a variety of materials such as but not limited to polymeric materials or obtained from bovine, porcine or equine pericardial tissue, depending on the type of usage.

In a first step the subcomponents of the unassembled pre-valve system 500 are placed on the catheter 510 or a reasonable assembly or delivery system alternative. The compressed crown 530 and compliant membrane 540 are placed unassembled on the catheter 510. The diameter 570 of the unassembled pre-valve system 500 is sufficiently small to suite a wide variety of applications. Further the relatively small diameter 570 of the unassembled pre-valve system 500 eases the task of traversing great distances in confined channels while the unassembled pre-valve system 500 is delivered towards the target site.

FIG. 6 is a transitional time-point during the transformation process of the pre-valve configuration to expanded valve configuration. Once at the target site, the subcomponents of the pre-valve configuration 600 are expanding from the catheter 610 as shown in FIG. 6. The fenestrated shape of the crown 620 provides an adequate attachment surface for deployment in soft substrates such as but not limited to calcified tissue, normal, tissue, etc. Although a fenestrated crown 620 is shown, a variety of mechanisms may be used in addition to or in place of a fenestrated crown 620. Non-limiting examples of which include, but are not limited to a monolithic stent-like component, a structure mainly made of multitude of woven wires, etc. Once the fenestrated component 620 is secured to the target site, the sheet component or unformed leaflets 630 are moved in the direction of A over the circumference of the crown 620 and over the prongs 650. The unformed leaflets 630 are comprised of a skirt, a role or a tubular sheet component of compliant membrane folded over the catheter 610 beside or adjacent the fenestrated crown 620. The prongs 650 along the fenestrated crown 620 will act as the support for valve's leaflets 630.

Each of the three prongs 650 is adapted with a series of grips 660 adapted to secure at least a portion of the sheet component or unformed leaflets 630 within their grasp. The grips 660 are configured to secure and fasten the shaping



points along the perimeter of the unformed leaflets **630**. The shaping points are folded onto themselves, such that when the prongs **650** are activated, the shaping points induce the unformed leaflets **630** to form a functional valve.

An enhanced view of a sheet component **700** with a fold **710** is shown in FIG. 7. The fold **710** of the sheet component **700** is formed at the forming point **720**. The fold **710** at the forming point **720** may be induced by a link **260** (See FIG. 2B) or a prong **550** (See FIG. 5) in contact with the sheet component **700**. As the sheet component **700** is positioned within an expandable component or ring (not shown), the sheet component **700** to the left and right of the fold **710** become a first leaflet **730** and second leaflet **740** respectively. In order to form the first leaflet (or a segment of a single piece leaflet) **730** and second leaflet (or another segment of the same single piece leaflet) **740**, the distal end **750** is brought into contact with the expandable component **760** thereby securing the distal end **750** of the sheet component **700** in place. Once the distal end **750** of the sheet component **700** is secured in place, a link or prong pulls or positions the proximal end **770** of the sheet component **700** into the expandable component **760** thereby forming a bicuspid valve within the hollow part of the expandable component **860** (or crown) at the target site.

The expanding non-functional configuration is sequentially transitioned towards a second functional valvular configuration. The transition begins with the expansion of the crown **620** and sheet component **730** (See FIG. 7), the prongs **650** are used to create a fold, such as the fold **710** depicted in FIG. 7 and to secure the leaflets preventing valve prolapse. An enhanced view of an expanded crown **800** and unformed sheet component **810** in contact with the prongs **820** is depicted in FIG. 8A. Each of the three prongs **820** attached to the unformed sheet component **810** creates a fold **830** in the material. The prongs **920** may be used to carry and deliver permanent sutures or fasteners to hold or grip the fold **830** of the sheet component **810**. The prongs **820** may either be removably or permanently affixed to the sheet component **810** at the fold **830** by shape memory and/or regular sutures. Once the folds **830** have been secured, the prongs **820** push or position the sheet component **810** into the expanded crown **800** in the direction of A, ultimately forming the valve **840** depicted in FIG. 8B.

Referring to FIG. 8B, the expanded crown **800'** and fully functional valve **840** are shown. The functional valve **840** is shown with three leaflets (or a tubular leaflet with three pinches) **850**. The expanded crown **800'** fits within the channel of the target area, while fluids are selectively allowed to pass through the valve **840**. The expanded crown **800'** resists the recoil force preventing wall collapse, secures the position of the valve **840** placement, and may prevent or minimize the process of tissue overgrowth and its impact on the functionality of the implanted valve **840** through drug and/or gene coating. The distal end overlap **860** of the valve **840** extends over the expanded crown **800'** and functions akin to an O-ring to prevent seepage along the wall of the expanded crown **800'**. For example, when used to replace an existing heart valve in body, the distal end overlap **860** of the valve **840** prevents paravalvular leakage and regurgitation. In one embodiment, a hollow annulus or support structure **870** may be placed inside the expanded crown **800'** and over the valve **840**. For applications in which the expanded crown **800'** are not needed, the support structure **870** may be placed over the valve **840** and secured within the distal end overlap **860**.

FIG. 8C is an illustration of an expanded tri-leaflet valve **840'** having three leaflets or a single tubular leaflet with 3 pinches **850'** supported by an annular ring **870'** enveloped by

a distal end overlap **860'**. An annular ring **870'** may be secured to at least one location to the distal end overlap **860'**. The annular ring **870'** would aide the valve **840'** in resisting recoil and provides a structure by which the valve **840'** could be secured to the target position.

Further description of the in situ formation of a valve and its method of delivery can be found in Appendix B, which is incorporated by reference as though fully set forth herein. Appendix B is also the content of a provisional application to which this application claims priority.

What is claimed is:

1. An in-situ forming valve, comprising:
  - an expandable component comprising a hollow portion, a distal end, and a proximal end;
  - a sheet component comprising a distal circumference and a proximal end, the distal circumference held in at least partial contact with the distal end of the expandable component, the proximal end of the sheet component further comprising at least two pinched regions; and
  - an at least one link attached to at least one point of the proximal end of the sheet, the link attached with the expandable component, the expandable component and link adapted to draw the proximal end of the sheet component into the hollow portion of the expandable component upon expansion of the expandable component, thereby forming a functional valve in situ.
2. The apparatus of claim 1, wherein the sheet component comprises a single tubular sheet.
3. The apparatus of claim 1, wherein the sheet component is a multitude of sheet components seated together.
4. The apparatus of claim 1, wherein the expandable component is at least partially comprised of a shape memory material.
5. The apparatus of claim 1, wherein the expandable component is at least partially comprised of an elastic material.
6. The apparatus of claim 1, wherein the expandable component is equipped with at least one bioactive agent selected from a group consisting of analgesics/antipyretics, antiasthmatics, antibiotics, antidepressants, antidiabetics, antifungal agents, antihypertensive agents, anti-inflammatories, antineoplastics, antianxiety agents, immunosuppressive agents, antimigraine agents, sedatives/hypnotics, antipsychotic agents, antimanic agents, antiarrhythmics, antiarthritic agents, antigout agents, anticoagulants, thrombolytic agents, antifibrinolytic agents, platelet aggregation inhibitor agents, antibacterial agents, antiviral agents, antimicrobials, and anti-infectives.
7. The apparatus of claim 1, wherein the sheet component is made from a material selected from a group consisting of natural membranes, synthetic material, engineered biological tissue, biological valvular leaflet tissue, pericardial tissue, and cross-linked pericardial tissue.
8. The apparatus of claim 1, further comprising an elongate delivery apparatus, wherein the in-situ formed valve is collapsibly mounted onto the elongate delivery apparatus.
9. The apparatus of claim 1, wherein the distal end of the at least one hollow sheet component at least partially extends out from the hollow portion and over the distal end of the expandable component.
10. The apparatus of claim 1, wherein the at least one link is detachably attached to at least three points of contact along the proximal end of the sheet, the link configured to position the proximal end of the sheet component into the hollow portion of the expandable component, thereby forming a three flap valve in situ.
11. The apparatus of claim 1, wherein the at least one link is made of a dissolvable material.



17

12. An in-situ forming valve, comprising:  
 an expandable component comprising a hollow portion, a  
 distal end, and a proximal end; and  
 a sheet component at least partially enveloping the distal  
 end of the expandable component, the sheet component 5  
 having a first pre-implantation configuration and a second  
 functional valvular configuration, the first pre-implanta-  
 tion configuration is configured to transform to the  
 second functional valvular configuration; and  
 wherein the expandable component and sheet component 10  
 are adapted to draw the sheet component into the hollow  
 portion of the expandable component upon expansion of  
 the expandable component and thereby transform the  
 sheet component into the second functional valvular  
 configuration.
13. The apparatus of claim 12, wherein the second func- 15  
 tional valvular configuration is reversibly transformable back  
 to the first pre-implantation.
14. An in-situ forming valve, comprising:  
 an expandable component comprising a hollow portion, a  
 distal end, and a proximal end; 20  
 a plurality of prongs pivotally attached with the distal end  
 of the expandable component; and  
 a sheet component comprising a distal end and a proximal  
 end, the proximal end of the sheet component adjustably

18

- attached with the each of the plurality of prongs, the  
 prongs adapted to position the proximal end of the sheet  
 component within the hollow portion of the expandable  
 component upon expansion of the expandable compo-  
 nent to form a functional valve in situ.
15. An in-situ forming valve, comprising:  
 an expandable component comprising a hollow portion, a  
 distal end, and a proximal end; and  
 a sheet component at least partially attached with the distal  
 end of the expandable component, the sheet component  
 having a first pre-formed configuration and a second  
 functional valvular configuration, the first pre-implanta-  
 tion configuration is configured to transform to the sec-  
 ond functional valvular configuration and reversibly  
 transform into the first pre-formed configuration; and  
 wherein the expandable component and sheet component  
 are adapted to draw the sheet component into the hollow  
 portion of the expandable component upon expansion of  
 the expandable component and thereby transform the  
 sheet component into the second functional valvular  
 configuration.

\* \* \* \* \*